

Bridging Gaps in Technology

SeethaRam Mechatronics Pvt Ltd
BRIDGING GAPS IN TECHNOLOGIES

Rameshwar Engineering SeethaRam Mechatronics Pvt Ltd.

Sensors for Automation Bridging Gaps in Technology



Bridging Gaps in Technology



Sensors for Automation

Table of Contents

S.No	Contents	Page No
01.	Overview	04
02.	Products, Services & Skills	06
03.	Focus Domains for Business	07
04.	Test Certificate	09
05.	Few Clients	12
06.	Applications	21
07.	Solutions	34
08.	Products	42
09.	Few Testing Machines	100

Overview

- 1994 - Started as a Liaison, Marketing Company
- 2004 – Trading firm for Sensors & Transducers
- 2007 – Add Engineering, Calibration & Service Capability
- 2011 - Add Customization, Mechatronics capability
- 2013 – Technology driven In-house development
- 2015 – Manufacturing & development of import substitution and Indigenization



Promoter's Background

- 1st Generation, Technocrat Initiative
- 2 decades of Hands-on Techno-Commercial experience
- Varied Engineering Domain experience
- Marketing skills among varied Client Base



Strengths

- Application Engineering Capability
- In-house Calibration
- Key Accounts, Institutional Business
- Quality Systems
- Solutions catering varied clientele
- Cross-functional expertise
- Manufacturing Capability



Application Engineering



Calibration Service



Development & Prototyping



Mechatronics



Hardware Design



Business Development




Key Accounts

Activity Segment



Analysis & Solution



Measurement



Detection



Products



Projects



Machinery



Products, Services & Skills

- Sensors & Transducers
- Signal Conditioning, Analogue / Digital Electronics
- Wireless Systems
- Solutions, Systems & Special Products
- Testing and Validation machinery
- Import Substitution

Skills

Electronics

- Embedded Design & Development of Hardware, Firmware & Software
- Controllers – 8 BIT TO 32 BIT
- ADCs – 8 BIT TO 24 BIT /DACs
- Protocols – SPI, I2C, RS 232, RS 485, MODBUS, CAN, Ethernet, Wireless - Bluetooth, ZigBee, GSM & GPRS

Mechanical

- Conceptual Designing
- Reverse Engineering, Modification
- 2D, 3D drawing
- Finite Element Analysis (FEA)
- Rapid Prototyping, Design Optimization
- Experience in varied Material and finish (Steel, Aluminium, Plastics)



Focus Domains for Business

- R&D Institutions
- Defence
- Industrial
- Automotive
- Atomic Energy and Energy Conservation
- Railways



Test Certificate



S-CEM/EMCD/TR/2015-2016/233

**EMI/EMC TEST REPORT FOR UNIPOT
MANUFACTURED BY M/s. SEETHARAM MECHATRONICS PVT. LTD., CHENNAI**

This report shall not be reproduced except in full without the written approval of SAMEER - Centre for Electromagnetics, Chennai





SAMEER-CENTRE FOR ELECTROMAGNETICS

(An Institution Setup by Ministry of Communications and Information Technology, Government of India)
2nd Cross Road, CIT Campus, Taramani, Chennai - 600 113, India

Tel : +91-44-22541352 / 22541817 Fax : +91-44-22541424 / 1938 Email: ccc@scemcd.gov.in Web: www.scemcd.gov.in

November 2015

S-CEM/EMCD/TR/2015-2016/223
Page 1 of 15

	Equipment Under Test (EUT)	: Unipot	
	Model Number of EUT	: UP106	
	Serial Number of EUT	: 10615027	
	Manufactured by	: M/s. Seetharam Mechatronics Pvt Ltd., Chennai	
			Certificate No T-9464


**EMI/EMC TEST REPORT FOR UNIPOT
MANUFACTURED BY M/s. SEETHARAM MECHATRONICS PVT. LTD., CHENNAI**

Test Request Particulars


- | | |
|--|--|
| 1. Test Request From | : M/s. Seetharam Mechatronics Pvt. Ltd., Chennai |
| 2. Equipment Under Test (EUT) | : Unipot |
| 3. Number of Test Sample(s) | : One |
| 4. Type of Tests Requested
(Applicable Standard) | 1. Conducted Emission Test as per CISPR 11, Class A, 2010
2. Electrostatic Discharge Immunity Test as per IEC 61000-4-2, 2008 |
| 5. Manufacturer | : M/s. Seetharam Mechatronics Pvt. Ltd., Chennai |
| 6. Model Number of EUT | : UP106 |
| 7. Serial Number of EUT | : 10615027 |
| 8. Test plan concurred by
(Customer Representative) | : Mr. R. Aswinkumar, Senior Engineer (PDU).
Seetharam Mechatronics Pvt. Ltd., Chennai |
| 9. EUT Arrived On | : October 12, 2015 |
| 10. Tested On | : October 13, 2015 |
| 11. Test Venue | : SAMEER-CEM, Chennai |
| 12. Status of the EUT on Receipt | : Functional |

Certified that the data reported in this report are valid only for the test sample mentioned above at the time of and under the stated conditions of measurement. Particulars of Manufacturer / Supplier, given in this report, are based on the information given by the customer, along with test request and SAMEER-CEM does not assume any responsibility for the correctness of that information for the above mentioned equipment under test.

Test Plan & Reviewed by:




(P. Salil)
Scientist – E

Authorized Signatory:



(Dr. Sanjay Baisakhiya)
Scientist - E

Office Seal



	Equipment Under Test (EUT)	: Unipot	
	Model Number of EUT	: UP106	
	Serial Number of EUT	: 10615027	
	Manufactured by	: M/s. Seetharam Mechatronics Pvt Ltd., Chennai	
			Certificate No T-0464

Annexure-4

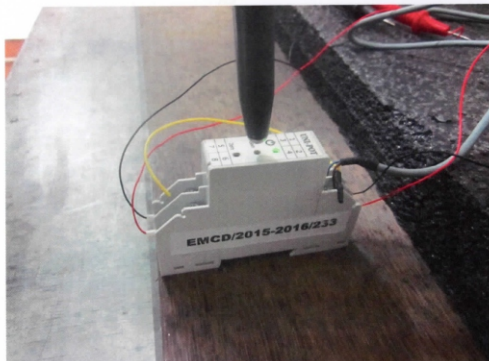

Electrostatic Discharge Immunity Test Setup (Air Discharge)

Annexure-5



Electrostatic Discharge Immunity Test Setup (Contact Discharge)



CEM/EMCD/TR/2015-2016/223
Page 14 of 15

Few Clients

WABCO



BRIDGESTONE

MAGNA

DAIMLER

MRF



ALSTOM

CATERPILLAR®



BOSCH




TAFE



APOLLO TYRES

ROYAL ENFIELD















Industry Wise



	Aerospace	22
	Nuclear Power	22
	Alternate Energy	23
	Automotive Manufacturing	23
	Automotive R&D	24
	Sub Sea Energy	24
	Medical & Pharmaceuticals	25
	Electrical & Power	25
	Quality, Fatigue & Endurance Test	26
	Process Industries	26

Product Wise


	Displacement Transducer	28
	Load Cell Sensor	30
	Torque Sensor	32

Solutions		
	DISC THICKNESS VARIATION EQUIPMENT	35
	AUTO PRESS	36
	ALTERNATOR EFFICIENCY TEST RIG	37
	PROPELLER DYNAMOMETER	37
	TRAJECTORY MOTION DETERMINATION	38
	STRUCTURAL HEALTH MONITORING	38
	STATIC TORQUE CALIBRATION EQUIPMENT	39

Column

	FCL	42
	FCIT	43


Pan Cake

	FPC (Compression)	44
	FPMT (Compression & Tension)	45

S - Type Load cell

	FS	46
---	----	----

Miniature Button




	FBC1 & 2	47
	FPMT (M)	48

Shear Beam

	FSB	49
	FSP	50

Special Type

Automotive Sensor

	PEDAL FORCE	51
	HAND BRAKE	51
	GEAR SHIFT	52

Multi Axis

	FMA6	53
---	------	----

Web Tension

	WT	54
---	----	----

INDEX

Displacement, Inclination & Acceleration

Displacement Sensor



GAMAN SERIES - PULSE

56

Inclinometer



3 AXIS INCLINOMETER

59

.... Torque, Signal Conditioner, Indicator Controller & Loggers



Reactive Torque (Flanged Type)

	STDF	60
---	------	----


Reactive Torque (Shaft Type)

	STDS	61
	STFS (Flanged Shaft)	62

Rotary Torque (Shaft Type)

	RTDS	63
	RTDS1	64
	RTDS2	67
	RTDS3	68




Rotary Torque (Flange Type)

	RTDF	71
---	------	----




Socket Wrench - Rotary Type

	RTSW	72
	RTSW (M)	73

Special Type

	RTDS (M) (Slipring Type Rotary)	75
	STSW	76
	STWC	77

Amplifier / Conditioner

	UNI-POT	78
	SANKET - S, S1, S4, S5 SERIES	79
	SANKET DIN RAIL SERIES	80


Signal Converter

	MODBUS RTU CONVERTER	81
---	----------------------	----

Wireless MODBUS Module




	WIRELESS MODBUS MODULE	82
---	------------------------	----

Power Converter





	POWER CARD	83
---	------------	----

.... Indicator Controller & Loggers





Koal Touch Series

	KOAL - S	84
	KOAL - A
	KOAL - G
	KOAL - E

Meya Series

	MEYA ICL	86
	MEYA TEMPERATURE	88
	MEYA ENDURANCE	89
	MEYA PRO	90

Sangrah Series

	DATA LOGGER - 4 CHANNEL	91
	BRAKE TEST LOGGER	93
	SPRING TEST LOGGER	96
	LOAD CELL CALIBRATOR	98

APPLICATIONS

Aerospace



- Hydraulic pressure monitoring.
- Hydraulic actuation in Landing Gear
- Torque & Swivel measurement
- Testing and Monitoring of Hydraulic Systems

Nuclear Power



- Special pebble testing and compression machine designed for testing the pebble on load versus displacement method.
- Reactor tube profiling after use

Alternate Energy



- Flanged Non-contact torque measurement system for various wind turbines prototypes.
- Gear oil temperature & pressure measurement
- Wireless measurement & Logging of electrical & weather parameters

Automotive Manufacturing



- Industrial assembly Press applications based on load Vs displacement for closer tolerances,
- Torque vs angle measurements,
- Assembly Force, Torque, Displacement,
- Pressure/ Leakage Testing
- Poke – Yoke (Mistake Proofing)



Automotive R&D



- Impact measurement
- Pedal force and travel
- Steering Angle and force
- Body Dynamics
- Shock Absorbers
- Seating comfort
- Power windows
- Airbags

Sub Sea Energy



- Pressure and Torque Calibration
- Underwater tugging force
- Temperature and Pressure measurement
- Wave force and displacement
- Under-water dynamometer



Medical & Pharmaceuticals



- Scales
- Patient monitoring
- Infusion pumps
- Pressure


Electrical & Power



- Switch gear Endurance Testing
- Fuse compaction
- Switch testing



Quality, Fatigue and Endurance Test

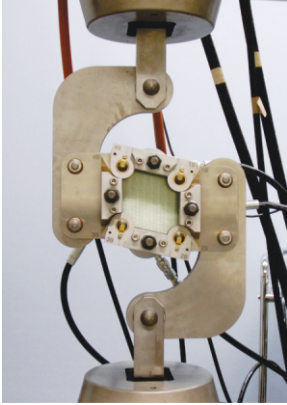

- Wire ropes
- Light Poles
- Material
- Test pieces in Civil Engineering
- Transmission shafts
- Critical components
- Wear components
- Automotive parts


Process Industries



- Temperature
- Pressure
- Level
- Mixing torque
- Tank Weighing

PRODUCT BASED APPLICATIONS

Displacement Transducer

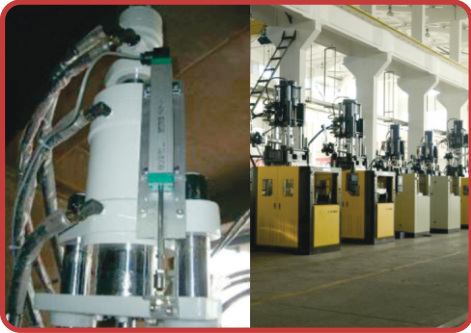

Hydraulic Actuator displacement in vertical injection molding machine (Rubber molding)



Non contact Laser displacement sensor used to measure flatness of auto components



Magnetic cursor potentiometer for construction equipment to precisely measure the arm movements



Oleodynamic cylinder positioning with magnetostrictive sensor




Level gauge coupled with an Magnetostrictive level transmitter




Magnetostrictive sensors integrated in hallow shaft hydraulic actuators to achieve precise position feed backs in mobile hydraulic & pressing applications


Displacement Transducer

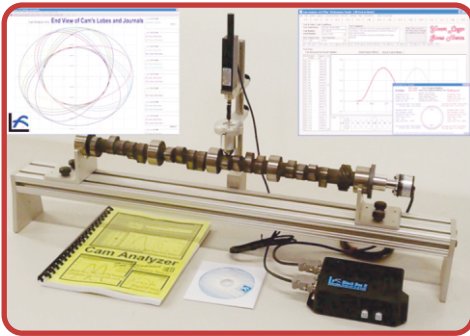


Cam shaft (Dual Axis) Analysis

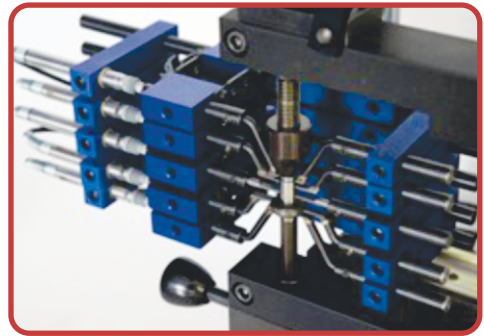


Multipoint run out testing of automobile parts

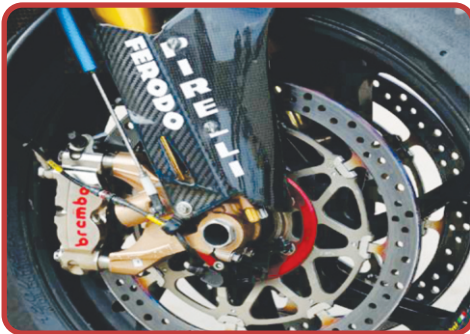


Shock absorber displacement measurement

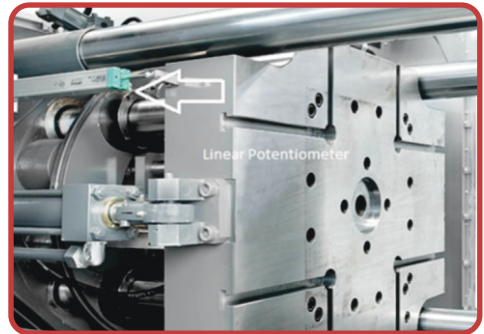

Die displacement measurement in injection molding machine

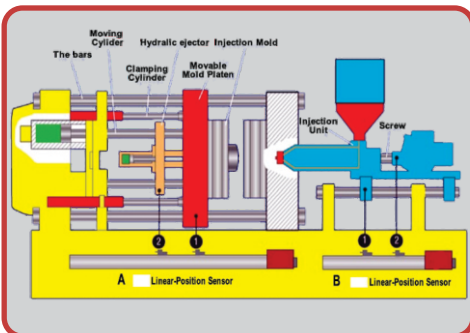

Linear Potentiometer applications in Injection molding machines

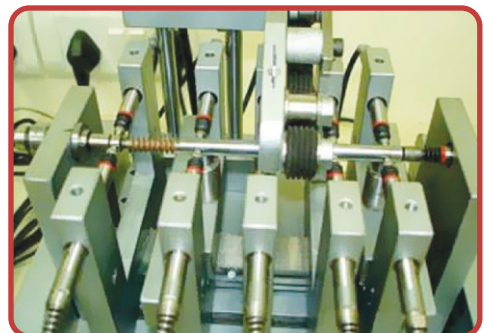

Multipoint dimensional Poke - Yoke using LVDT

Force Sensor



Two wheeler chain tension monitoring system



In-vehicle automotive 2 axis gear effort force sensor with indication & logging systems



2 wheeler & 3 wheeler clutch / Hand brake effort sensor for in vehicle clutch force measurement



In-vehicle pedal effort sensor for automotive brake & clutch testing




Axial load cell in bush pressing press assembly




S-type load cell in puncture resistance force testing


Force Sensor

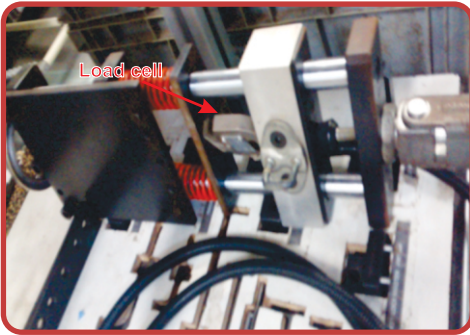


S-type load cell is used to measure the tensile load acting on the door latch

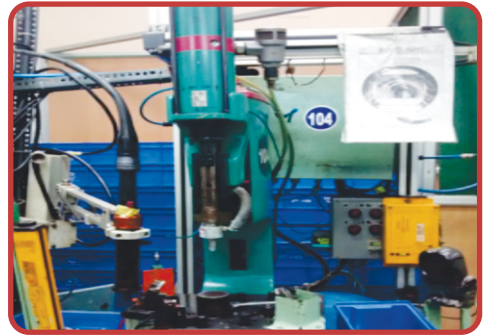

Actuator load measurement in the oil seal tear machine

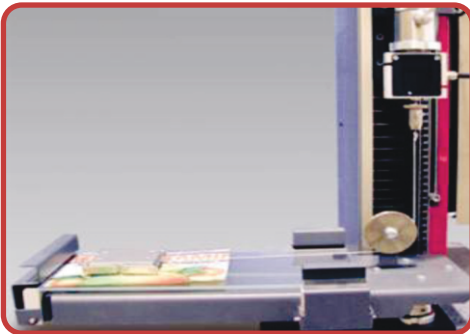

Co-efficient of friction testing

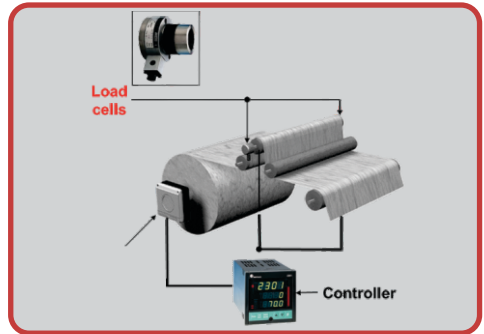

Radial type load cell for web tension monitoring in textile and paper industries monitoring




Hydraulic jack lift force feedback monitoring using load cell in avionic applications



Pin type load cell in asphalt dispensing hopper weighing


Torque Sensor

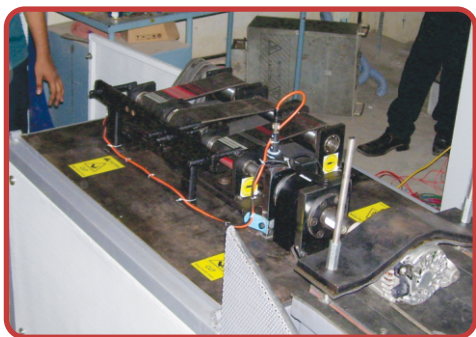


High speed Alternator torque performance testing using non contact torque transducer



Bottle cap torque testing using customized reactive torque transducer

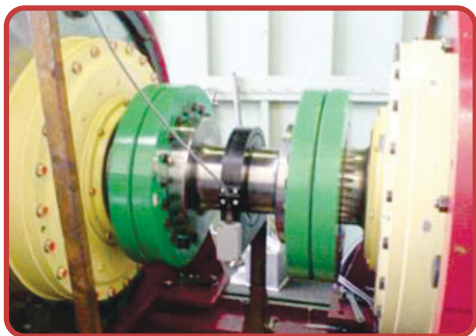

Reactive torque transducer in brake drum testing dynamometer

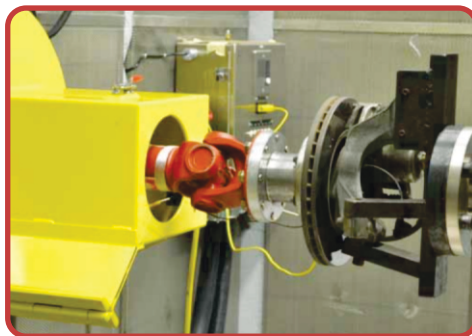

Brake caliper frictional torque testing using reactive torque transducer




Rotary torque transducer in automotive pump testing



Miniature nut runner torque transducer with male & female square adoptions, adoptable for electrical & pneumatic nut runners


Torque Sensor

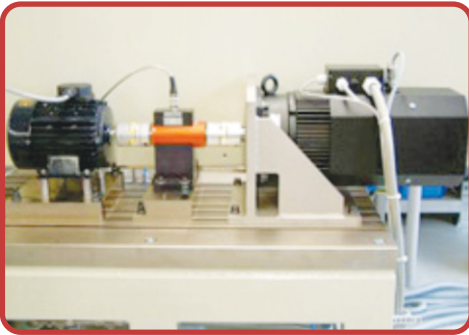

Rotary torque transducer coupled inline with eddy dynamometer in motor performance test rig



Rotary torque transducer with RPM output in seat regulation DC motors test rig

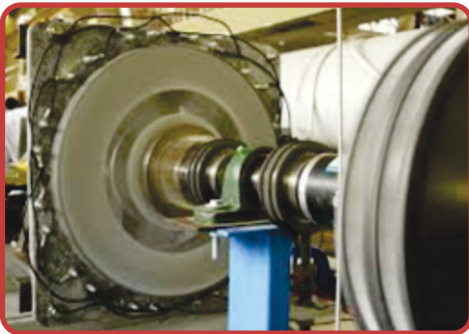


Non-contact rotary torque transducer in wind mill generator torque testing



To measure the torque acting on the brake chamber in the double end fatigue rig



Rotary torque transducer kept inline with steering column simulator in steering rack and pinion assembly test rig

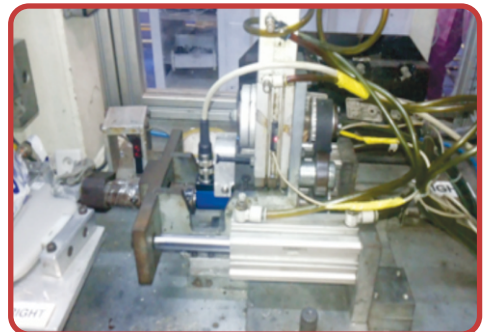

Rotary torque transducer kept inline in sun visor assembly to ensure assembly torque quality

SOLUTIONS

DISC THICKNESS VARIATION - DTV


Disc Thickness Variation is uneven wear of brake disc on the brake rotor. The deformation of brake discs is measured using non-contact laser sensor in the idling state with the vehicle on the ramp / lifted on hydraulic jacks.

FEATURES

- Flexible physical adjustment of sensor in X and Y co-ordinates.
- Two high speed and high precision laser sensor for disc measurement
- Rotary potentiometer for angle measurement
- Measure run out for every 1°
- PC Suite software for plotting and logging
- Peak and valley points identified
- Real time polar graph of run-out
- Individual sensor calibration menu
- Comparison and overlapping with previous run-out data
- Password protection for setting
- Database filtering based on file name, radius and date of test
- Plot graph from database and flexible comparison option
- Simple file name and file setting
- Export data in csv and graph in png format
- Generate report in pdf
- Battery backup for unit



SCREEN SHOTS

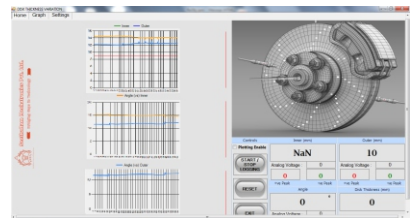

TECHNICAL SPECIFICATION

□ Mechanical Setup	
Adaptive rotor diameter (mm)	200 to 400
Disc Thickness	12~30mm (other size consult Factory)
Weight	4 kg Inclusive of Fixtures & Carry case
□ Sensor Details	
Laser sensor excitation (Vdc)	12
Measurement Range (μm)	5000
Accuracy (μm)	±1
Angle sensor excitation (Vdc)	10
Angle Resolution	1°
□ Electronic Unit	
Power Supply (V DC)	12-19
Sensor excitation (V DC)	Powered from DTV unit
Power	On/Off Switch
Power indication	Green Led
Connection type	Socket Connectors
Connection locking	Bayonet
Communication	USB for PC interface
Ingress Protection	IP50
Operating temperature °C	0-50
Storage temperature °C	0-100
Dimension (mm)	220 x 169 x 55
Weight (Kg)	0.6



Specifications are subject to change without notice



AUTO PRESS

Electro Press is an ideal solution in Precision applications as against hydraulic and pneumatic presses. Our dedicated "Auto-Press" device offers precision logging and closed loop control for most Electric Press combinations. This system is compatible to Load cells and displacement systems (potentiometric, digital TTL sensors or any such sensors) The system is pre-loaded with various Press modes. Under closed loop feedback control, Precision in position, Speed and working force can be attained easily. The log, decision and control requirement is easy-set as per user requirements. The system is compatible most open-ended devices and gives a clear cost benefit advantage.





Major pressing functions

- Constant Speed, Set Stop position
... Stops when it reaches a present position
- Constant Speed, Set Stop Load
... Stops after detecting a designated load
- Constant Speed, Set Distance
... Stops at a designated distance
- Constant Speed, Set Differential
... Stops after detecting a rapid displacement load
- Constant Load, Timed Pressure
... Presses at a constant load for a set length of time

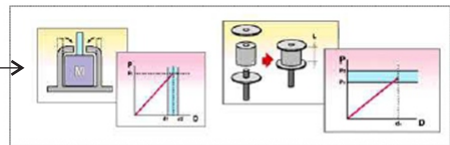

Multi-pressing functions


- Two Section PL (Pos. Stop/Load. Stop)
- Two Section LD (Load . Stop/ Distance. Stop)
- * You can also create your own multi-pressing modes

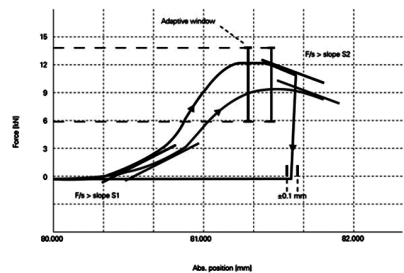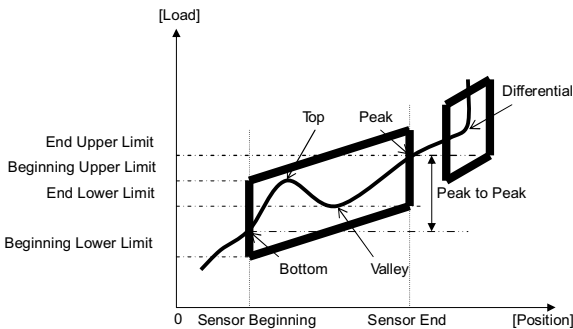

ALTERNATOR EFFICIENCY TEST RIG

FEATURES


- Wide range of alternator can be seated (dia-10 to 300mm and length-100 to 300mm).
- Non contact torque transducer
- PLC/HMI based system to indicate power, torque, speed and efficiency.
- Flexible control through variable frequency drive (vfd).
- Max RPM at 10,000, minimum resolution 24 RPM.
- Three directional alignment to locate alternator inline with torque sensor.

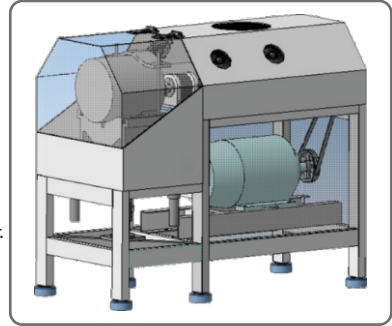

SIMILAR TESTING MACHINES

- Bearing performance test at higher RPM at various Temperatures
- Pump efficiency test rig
- Gearbox efficiency test rig
- High speed deformation test for various rotating parts.


GENERAL ARRANGEMENT DRAWING

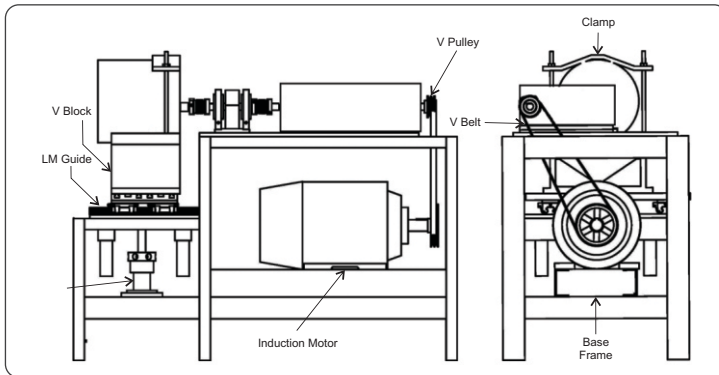

PROPELLER DYNAMOMETER

The Marine Propeller Dynamometer is meant to qualify the performance of the propeller systems under test / actual conditions. The dynamometer is placed in-between the driving mechanism and propeller systems. These dynamometers are compact in size and weight so it is suitable to use with small models. It can be customized as per testing requirements. Our propeller dynamometer range permits experiments over a wide range of speeds, thrusts, and torques.


The dynamometer enables measurement of the torque and the thrust force acting inline on the shaft of the propeller system. The Marine Propeller Dynamometer constitutes Strain Gauge based torque measuring and thrust measuring system, where precise measurement is accomplished.



TRAJECTORY MOTION OF A BOAT IN WATER - BASIN

A wireless transceiver placed on the boat receives varying signal strength from the grid sensor. This determines the position of the boat.

The wireless transceiver on the observation room receives the boat position information continuous and the position is plotted on the PC screen dynamically.

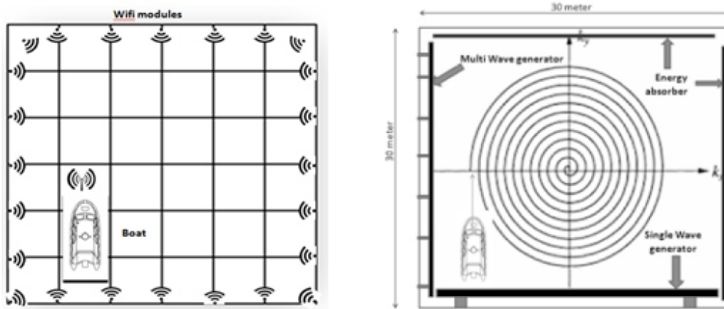

Speed of the boat may not be the limiting factor for the position determination. The system can work on slow and very high speeds. (kindly specify the max speed of the boat)


The boat position can be represented as a coordinates or a down sized mimic of the trajectory path of the boat in the water basin.

STRUCTURAL HEALTH MONITORING

Structural monitoring involves the process of implementing a damage detection and characterization strategy for engineering structures.

Structural health parameters such as corrosion, cracking, strength, tension, location of rebar / delaminations are measured with physical parameters measuring sensors.

Smart sensors with inbuilt power supply, primary sensors and transmitters enable wireless sensor network which helps in remote structural health monitoring.



Structural Health Parameters	Physical Parameters	Sensor Used
Corrosion	Acceleration	Accelerometers
	Strain	Strain gauge
Cracking	Climatic Conditions	ECO sensors
Strength	Curvature	LVDTs & Inclinator
Tension	Displacements	Non Contact Laser displacement sensor
	Load	Load cell
Location of rebar / Delaminations	Tilt / Slope	Inclinometer

Specifications are subject to change without notice

Torque Calibration / Testing on the



Useful for all kind of torque wrenches –

Hand-held, Electrical or pneumatically operated





A static torque sensor for measurement of torque of stationary objects or within a certain angle rotation. Suitable for torque measurement of pneumatic and electric screwdriver etc for various automobile and engineering parts.



Standard sockets available as accessories to be added to cost



Stable calibration or test system with traceability certificate



PRODUCT



CTS



FORCE COLUMN LOADCELL - FCL


COLUMN TYPE LOAD CELLS

FEATURES


- Model FCL load cells have Male thread mounting and measure both tension & compression load force.
- Applications include Performance testers for Automotive industry, Assembly press

TECHNICAL SPECIFICATION


Model	FCL
Rated capacity(R.C.)	100kgf, 200kgf, 500kgf, 1tf, 2tf, 3tf, 5tf, 10tf
Rated output(R.O.)	1mV/V
Nonlinearity	0.15% of R.O.
Hysteresis	0.15% of R.O.
Repeatability	0.1% of R.O.
Creep	0.05% of R.O.
Zero balance	±1% of R.O.
Excitation recommended	10V (max. excitation 15V)
Terminal resistance input , output	350Ω±1%
Insulation resistance bridge	2000MΩ
Temperature range, compensated	-10~60°C
Temperature range, safe	-20~80°C
Temp. effect on rated output	±0.01% of LOAD/10°C
Temp. effect, on zero balance	±0.02% of R.O./10°C
Safe overload	120% R.C..
Cable length	Ø5mm 4core, 3m

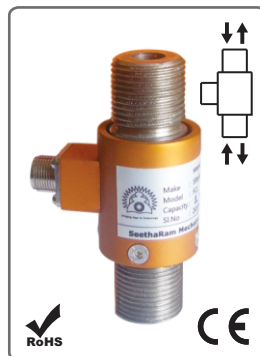

DIMENSION DETAILS



WIRING INFORMATION



DIMENSION TABLE

Unit : mm

Capacity	A	B	ØC	D	E	Weight(kg)
100, 200, 500 Kgf	75	35	28	M16x1.5	20	0.5
1, 2, 3tf	75	35	28	M20x1.5	20	
5tf	75	35	35	M24x2	20	
10tf	170	100	60	M39x2	35	0.7

Specifications are subject to change without notice


FORCE COLUMN INTERNAL TREAD - FCIT

CANISTER TENSION LOAD CELLS

The FCIT series load cell is ideal for measuring both tensile and compressive forces. The standard metric threads at each end of the load cell are designed to accept standard spherical seating rod-end Bearing.

FEATURES


- Model FCIT load cells have Female thread mounting and measure both tension & compression load force
- High Alloy Tool Steel construction for resistance against shock and overload.
- Customization to fit your dimensional needs.



APPLICATION

- Line tension measurement
- Hanging type of weighing (E.g. –silos, hopper etc...)
- Force measurement in hydraulic, pneumatic and servo systems
- Calibration of testing machine
- Extrusion process
- Industrial process control


WIRING INFORMATION



TECHNICAL SPECIFICATION

Model	FCIT
Rated capacity(R.C.)	500kgf, 1, 2, 3, 5, 10tf
Rated output(R.O.)	1mV/V
Nonlinearity	0.15% of R.O.
Hysteresis	0.15% of R.O.
Repeatability	0.1% of R.O.
Creep	0.05% of R.O.
Zero balance	±1% of R.O.
Excitation recommended	10V (max. excitation 15V)
Terminal resistance input , output	350Ω±1%
Insulation resistance bridge	2000MΩ
Temperature range, compensated	-10~60°C
Temperature range, safe	-20~80°C
Temp. effect on rated output	±0.01% of LOAD/10°C
Temp. effect, on zero balance	±0.02% of R.O./10°C
Safe overload	120% R.C..
Cable length	Ø5mm 4core, 3m

DIMENSION DETAILS

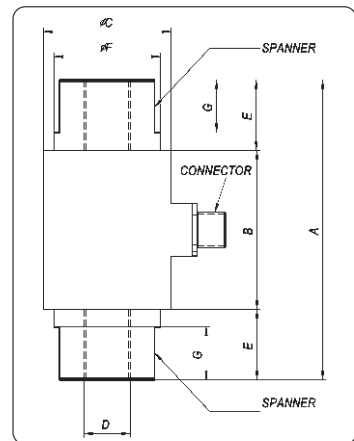

DIMENSION TABLE

Unit : mm

Capacity	A	B	ØC	D	E	ØF
500 Kg, 1, 2tf	85	45	36	M12x1.25	20	30
3, 5tf	85	48	45	M20x1.5	22	37.5
7.5, 10tf	108	52	55	M24x2	29	44

FORCE PANCAKE - FPC (COMPRESSION)


PAN CAKE COMPRESSION LOAD CELLS

FEATURES


- Miniature compression type
- Simple installation
- These Load cells are extremely small and lightweight.

TECHNICAL SPECIFICATION


Model	FPC
Rated capacity(R.C.)	50, 100, 200, 500kgf, 1, 2, 3, 5, 10tf
Rated output(R.O.)	2mV/V \pm 0.4%
Nonlinearity	0.15% of R.O.
Hysteresis	0.1% of R.O.
Repeatability	0.1% of R.O.
Zero balance	\pm 2% of R.O.
Temperature effect, on rated output	0.1% of R.O./10°C
Temperature effect, on zero balance	0.05% of R.O./10°C
Temperature range, compensated	-10~70°C
Temperature range, safe	-20~80°C
Terminal resistance input	350 \pm 50 Ω
Terminal resistance output	350 \pm 2 Ω
Insulation resistance bridge/case	2000M Ω
Excitation recommended	10V (max. excitation 15V)
Safe overload	150% R.C.
Cable length	Ø5mm 4core, 3m

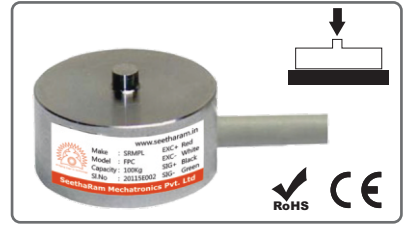

DIMENSION DETAILS

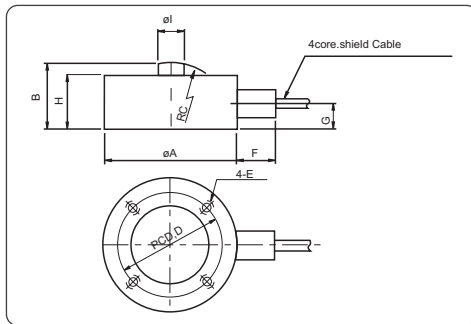

WIRING INFORMATION



DIMENSION TABLE

Unit : mm

Capacity	ØA	B	C	D	E	F	G	H	ØI	Weight(kg)
50kgf-2tf	51	26	R50	42	M5x0.8DP6	15	10.5	22	10	0.4
3tf, 5tf	88	42	R150	72	M6x1DP10	23	17	37	18	2
10tf	88	47	R150	72	M6x1DP10	23	17	42	18	2

Specifications are subject to change without notice

FORCE PANCAKE MALE THREAD - FPMT


PAN CAKE TENSION LOAD CELLS

FEATURES


- Compression or Tension Load Cell.
- These load cells are extremely small and lightweight. Protection Class IP67.

TECHNICAL SPECIFICATION


Model	FPMT
Rated capacity(R.C.)	50, 100, 200, 500kgf, 1tf, 2tf
Rated output(R.O.)	2mV/V \pm 0.4%
Nonlinearity	0.15% of R.C.
Hysteresis	0.1% of R.C.
Repeatability	0.05% of R.C.
Zero balance	\pm 2% of R.O.
Temp. effect on rated output	\pm 0.01% of LOAD/10°C
Temp. effect, on zero balance	0.05% of R.O./10°C
Temperature range, compensated	-10~70°C
Temperature range, safe	-10~80°C
Terminal resistance input	350 Ω \pm 30 Ω
Terminal resistance output	350 Ω \pm 2 Ω
Insulation resistance bridge/case	2000M Ω
Excitation recommended	10V (max. excitation 15V)
Safe overload	120% R.C..
Cable length	Ø5mm 4core, 3m

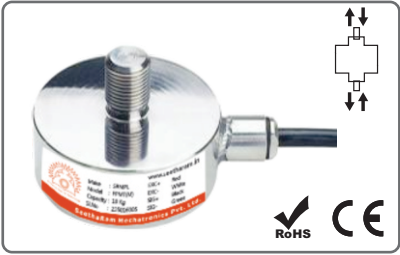

DIMENSION DETAILS

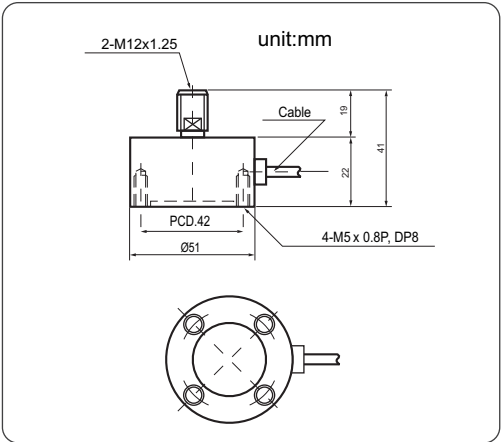

WIRING INFORMATION



FORCE S-TYPE - FS


S TYPE LOAD CELLS

FEATURES


- Compact size.
- These are extremely accurate and compact Tension / Compression load cell.
- Protection Class IP65

TECHNICAL SPECIFICATION


Model	FS
Rated capacity(R.C.)	2, 5, 10, 20, 50, 100, 200, 500Kgf, 1, 2, 3, 5, 10tf
Rated output(R.O.)	2.0mV/V \pm 1%(2,5kgf: 1.5mV/V \pm 1%)
Nonlinearity	0.03% of R.O.
Hysteresis	0.03% of R.O.
Repeatability	0.03% of R.O.
Zero balance	\pm 2% of R.O.
Temperature effect, on rated output	0.05% of LOAD/10°C
Temperature effect, on zero balance	0.1% of R.O./10°C
Temperature range, compensated	-10~60°C
Temperature range, safe	-20~80°C
Terminal resistance input	350 \pm 50 Ω
Terminal resistance output	350 \pm 2 Ω
Insulation resistance bridge/case	2000M Ω
Excitation recommended	10V (max. excitation 15V)
Safe overload	150% R.C.
Cable length	Ø5mm 4core, 3m



DIMENSION DETAILS

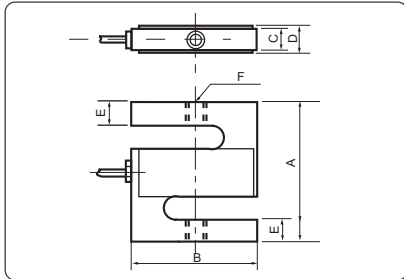

WIRING INFORMATION



DIMENSION TABLE

							Unit : mm
Capacity	ØA	B	C	D	E	F	Weight(kg)
2, 5 Kgf	60	50	13	16	10	M6x1	0.4
10, 20 Kgf	70	52	13	18	13	M6x1	
50, 100, 200 Kgf	70	52	18	24	13	M12x1.75	
500 Kgf, 1tf	70	62	22	25	15	M12x1.75	0.8
2tf	96	84	30	35	21	M20x1.5	2
3tf	120	96	35	41	30	M24x2	3
5tf	120	96	40	44	30	M24x2	
10tf	165	140	60	66	46	M39x2	8.5

Specifications are subject to change without notice

FORCE BUTTON COMPRESSION - FBC1 & 2


MINIATURE COMPRESSION LOAD CELLS

FEATURES


- Optimum suitability for weight distribution analysis.
- Super compact and light weight
- Competitive price. Stainless steel construction.

TECHNICAL SPECIFICATION


Model	FBC1 & 2
Rated capacity(R.C.)	1, 2, 5, 10, 20, 50, 100, 200, 500kgf, 1, 2, 3tf
Rated output(R.O.)	0.7mV/V to 1.2mV/V
Nonlinearity	1.0% R.O.
Hysteresis	1.0% R.O.
Repeatability	1.0% R.O.
Zero balance	±5% of R.O.
Terminal resistance input	350Ω ±10%
Terminal resistance output	350Ω ±5%
Temperature range, allowable	-20 to +70°C
Excitation recommended	5V DC (max. excitation 15V)
Safe overload	150% R.C.
Cable length	Ø3 4core cable, 3m

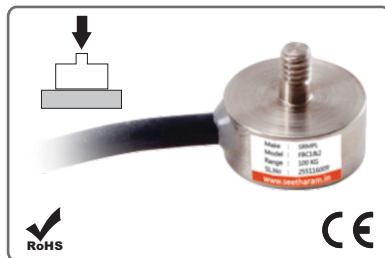

WIRING INFORMATION



DIMENSION DETAILS

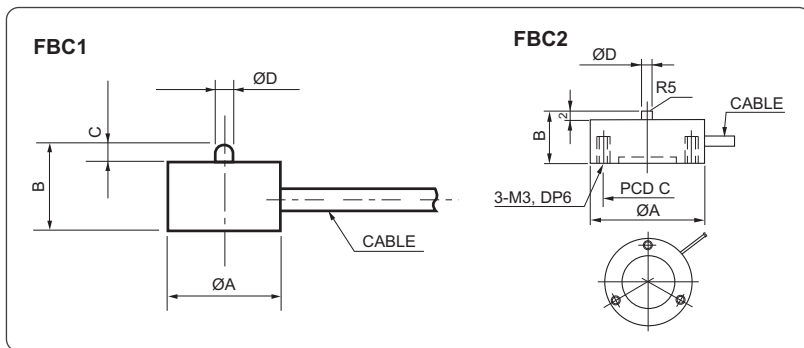

DIMENSION TABLE

FBC1			Unit : mm		
Capacity	A	B	C	ØD	Weight (kg)
1, 2, 5kgf	16	12	2	2.5	0.2
10, 20, 50, 100, 200kgf	20	11.5	2	2.5	
300, 500,kgf, 1, 2, 3tf	20	14	0.7	4	0.3

FBC2			Unit : mm		
Capacity	A	B	C	ØD	Weight (kg)
1, 2, 5kgf	21	12	17	2.5	0.3
10, 20, 50, 100, 200kgf	26	12	21	2.5	
300, 500,kgf, 1, 2tf	26	14	21	4	
3tf	26	14	21	8	

FORCE PANCAKE MALE THREAD MINIATURE - FPMT (M)


MINIATURE TENSION LOAD CELLS

FEATURES


- Compression or Tension Load Cell.
- These load cells are extremely small and lightweight.
- Protection Class IP67.

TECHNICAL SPECIFICATION


Model	FPMT (M)
Rated capacity(R.C.)	1, 2, 5, 10, 20, 50, 100, 200kgf
Rated output(R.O.)	0.7~1.2mV/V
Nonlinearity	0.1% of R.O.
Hysteresis	0.1% of R.O.
Repeatability	0.1% of R.O.
Zero balance	±2% of R.O.
Temp. effect on rated output	0.1% of LOAD/10°C
Temp. effect, on zero balance	0.05% of R.O./10°C
Temperature range, compensated	-10~60°C
Temperature range, safe	-10~80°C
Terminal resistance input	350Ω±30Ω
Terminal resistance output	350Ω±2Ω
Insulation resistance bridge/case	2000MΩ
Excitation recommended	5V (max. excitation 15V)
Safe overload	120% R.C..
Cable length	Ø3.4core shield cable, 3m

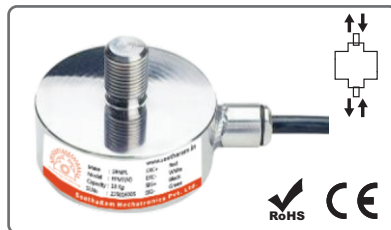

DIMENSION DETAILS

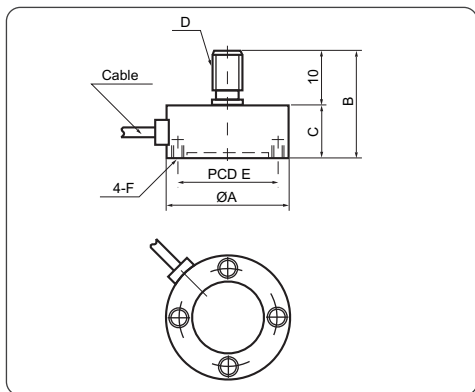

WIRING INFORMATION



DIMENSION TABLE

Unit : mm

Capacity	ØA	B	C	D	E	F
1, 2, 5 Kgf	23	20	10	M3 x 0.5	18	M3DP5
10, 20, 50, 100, 200 Kgf	27	21	11	M6 x 1	22	M3DP5


Specifications are subject to change without notice

FORCE SHEAR BEAM - FSB

SHEAR BEAM LOAD CELL

FEATURES


A compact and low cost, shear type compression load cell. Economic model shear type transducers with a high accuracy of 0.02% R.O. Platform and Tank scale weighing. Protection Class IP67

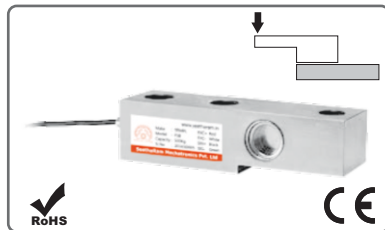


TECHNICAL SPECIFICATION

Model	FSB
Rated capacity(R.C.)	50,100,150,300,500kgf, 1,2,3,5,6,10,12tf
Rated output(R.O.)	2mV/V \pm 0.1%
Nonlinearity	0.03% of R.O.
Hysteresis	0.02% of R.O.
Repeatability	0.02% of R.O.
Creep(20min)	0.03% of R.O.
Zero balance	\pm 5% of R.O.
Temp. effect, on rated output	0.02% of LOAD/10°C
Temp. effect, on zero balance	0.05% of R.O./10°C
Temp. range, compensated	-10~50°C
Temp. range, safe	-20~80°C
Terminal resistance input	350 \pm 30 Ω
Terminal resistance output	350 \pm 3 Ω
Insulation resistance bridge	2000M Ω
Excitation recommended	10V (max. excitation 15V)
Safe overload	150% R.C.
Cable length	\varnothing 5 \pm 0.3mm 4core, 3m

WIRING INFORMATION



DIMENSION DETAILS

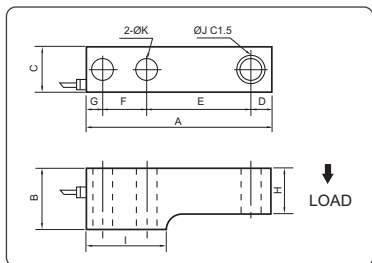

DIMENSION TABLE

Unit : mm

Capacity	A	B	C	D	E	F	G	H	I	\varnothing J	\varnothing K	Weight(kg)
50kg ~ 300kg	135	36	26	17	75	25	18	32	58	11.5	11.5	0.5
500kg ~ 2tf	135	38	30	17	75	25	18	34	58	13.5	13.5	1.1
3tf ~ 5tf	170	48	38	20	85	50	15	39	79	18.5	18.5	2.3
6tf	203	48	50	23	95	62	23	39	110	24.5	24.5	3.5
10tf ~ 12tf	263	60	60	30	118	90	25	52	143	26	26	9


Specifications are subject to change without notice

FORCE SINGLE POINT - FSP

SINGLE POINT LOAD CELL

FEATURES


- This strain gage load cell has the characteristics of high accuracy and low price.
- Commercial & Engineering applications
- Protection Class IP65

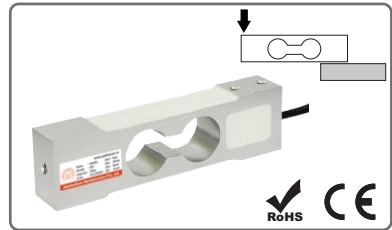

TECHNICAL SPECIFICATION

Model	FSP		
Rated capacity(R.C.)	150, 300, 600 gf	1, 2, 3 kgf	5, 10, 15, 30, 50 kgf
Rated output(R.O.)	1.2mV/V±1%	1mV/V±1%	1.5mV/V±1%
Nonlinearity	0.02% of R.O.		
Hysteresis	0.02% of R.O.		
Repeatability	0.02% of R.O.		
Creep	0.03% of R.O./20min		0.02% of R.O./20min
Zero balance	±5% of R.O.		
Terminal resistance, input	420±30Ω		
Terminal resistance, output	350±2Ω		
Insulation resistance	2000MΩ		
Temp. range, compensated	0~+40℃	-10~+50℃	
Temp. range, safe	-10~+50℃		
Temp. effect, on zero balance	0.03% of R.O./10℃		
Temp. effect, on rated output	0.02% of LOAD/10℃		
Excitation recommended	10VDC (max. excitation 15V)		
Safe overload	150% R.C.		
Cable length	Ø3, core shield cable, 40cm		
Allow maximum platform size	Ø80	200 x 200mm	300 x 300mm
Weight	200g	300g	400g
Wiring information	Exc+:Red, Exc-:White, Sig+:Black, Sig-:Green		

DIMENSION DETAILS

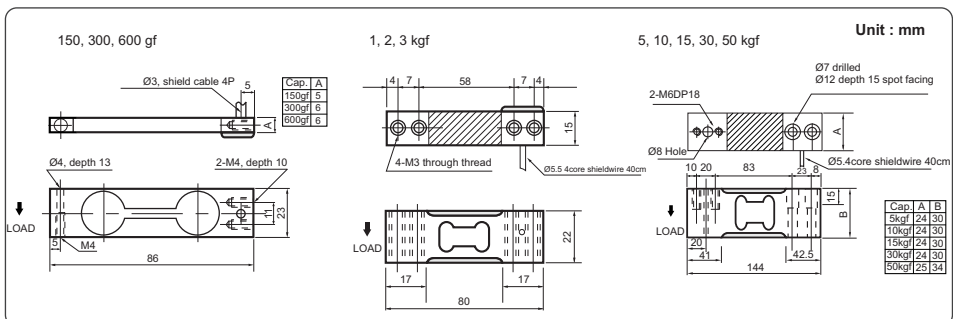


Specifications are subject to change without notice

PEDAL FORCE SENSOR - PFS

Our pedal force sensors are specially designed for the measurement of foot forces on brake pedals. The pedal force sensor is mounted directly on the brake pedal for the measurement. An overload safety device protects the pedal force sensor against mechanical destruction.

FEATURES

- Available ranges up to 1500 N
- Cast construction (IP 65 Protection)
- Option with hand-held display.



APPLICATIONS

- Brake force measurement on vehicles

TECHNICAL SPECIFICATION

Model	Pedal Force Sensor
Nominal load Range	1000N / 1500N
Overload limit	1000N / 1800N
Accuracy	±0.5% F.S
Degree of protection	Ip65
Operating temperature range	-10°C to +50°C
Cable	4x0.14high -flexibility PVC, length 2.5m or spiral cable, length 0.5 to 4m

HAND BRAKE - HB

The hand brake sensor for two-wheelers is used for measurement of the forces on the handbrake lever of motor cycles and bicycles. The readings can be read off from strain indicator.

FEATURES


- Nominal load - Two-wheeler version - upto 500 N
- Shallow construction
- Mechanical overload protection
- Available with combined hand-held terminal



TECHNICAL SPECIFICATION

Model	HB
Nominal load	0 - 500 N
Accuracy class	0.5 % f.s.
Protection	I P 65
Dimensions	W 26 x L 100 x H 23 mm
Material	aluminium
Sensitivity	1mV/V
Sensor excitation	< + 10 V
Cable length	1.5m
Cable type	FDCY 4 x 0.14 mm ²

DIMENSIONAL DETAILS



Specifications are subject to change without notice

GEAR SHIFTING - GS 500N

GEAR SHIFTING LEVER LOAD CELL

FEATURES


This can measure X and Y force of gear shifting lever. The gear shift load cell is a quality tool to measure effort to shift gears in automotive quality testing. An ergonomically designed gear knob senses the force from a human hand or a mechanical actuator. The gear shift load cell is supplied calibrated and ready to use.

TECHNICAL SPECIFICATION


Model	GS 500N
Rated capacity(R.C.)	500N
Rated output(R.O.)	1mV/V \pm 1%
Nonlinearity	1% R.O.
Hysteresis	1% R.O.
Resistance	350 Ohm \pm 1%
safe overload	120% R.C.
Maximum Excitation	Max. excitation 15V



DIMENSION DETAILS

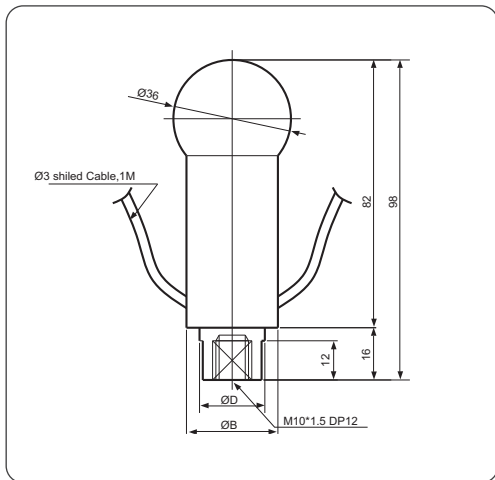

WIRING INFORMATION



MULTI COMPONENTS LOAD CELL


MULTI COMPONENTS LOAD CELL

FEATURES


This is load cell of simple construction for torque and axial force detection. Provided with a flange for easy installation. Most suitable for use in materials testing machines.

TECHNICAL SPECIFICATION


Model	FMA6
Rated output(R.O.)	0.5mV/V±1%
Nonlinearity	0.5% R.O.
Hysteresis	0.5% R.O.
Repeatability	0.3% R.O.
Excitation recommended	10V (max. excitation 15V)
Terminal resistance	350 Ohm±3.5
Insulation resistance bridge	2000 M
Temp. effect on rated output	±0.03% R.O./°C
Temp. effect, on zero balance	±0.03%/°C
Safe overload	120% R.C
Cable length	Ø7mm x 16C x 3m
Degree of interference	±3% R.O.

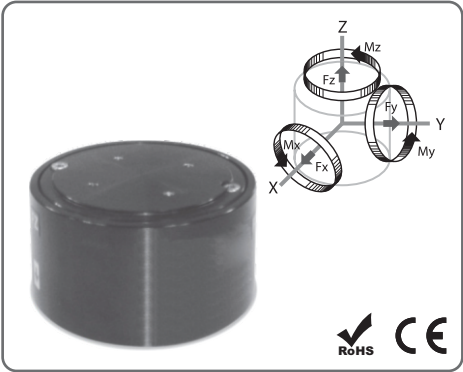

WIRING INFORMATION



DIMENSION DETAILS

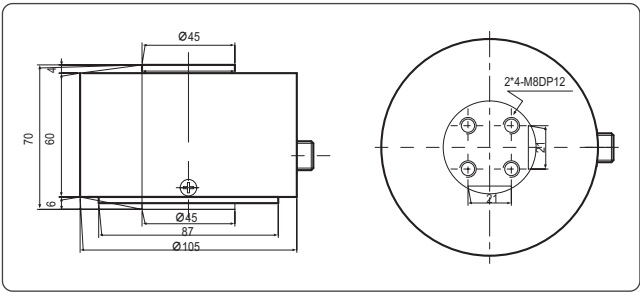

DIMENSION TABLE

F - Force : N
M - Moment : Nm


MODEL	Rated Capacity						
	FX	FY	FZ	MX	MY	MZ	
FMA6	20	20	20	2	2	2	
	50	50	50	5	5	5	
	100	100	100	10	10	10	
	200	200	200	20	20	20	
	500	500	500	50	50	50	

WEB TENSION - WT

FORCE TRANSDUCERS FOR MEASURING THE WEB / SPINDLE TENSION

FEATURES



- Range of measurement: from 100 N to 2kN
- Accuracy class: 0.5%
- Corrosion resistant
- Internally generated calibration signal
- Orientation of the axis of maximum sensitivity for 35° independently from the position of the fixing holes
- Grade of protection: IP65 (DIN 40050)
- Integrated protection against overloads



TECHNICAL SPECIFICATION

Model	WT
Accuracy	0,50%
Nominal full scale load (Ln)	100N...2kN
Nominal output at FSO	2mV/V
Output tolerance at Ln	<± 1% FSO
Combined errors: Non linearity	
Hysteresis, Repeatability	< ± 0.5% FSO
Creep (after 30 min. at Ln)	< ± 0.06% FSO
Zero load out of balance signal	< ± 1% FSO
Thermal drift in	Sensitivity
compensated	Zero
range	Calibration
Nominal bridge resistance	350 Ohm
Isolation resistance	> 10 GOhm
Nominal supply voltage	10V
Maximum supply voltage	15 V
Compensated temperature range	-10...+50°C
Maximum temperature range	-20...+60°C
Storage temperature range	-30...+80°C
Permitted static load	100% Ln
Maximum applicable load	300% Ln
Rupture load	> 500% Ln [6 kN max.]
Maximum static lateral load	150% Ln
Maximum elastic deformation at Ln	< 0,5 mm
Grade of protection (DIN40050)	IP65
Electrical Connections	Connector
Elastic element material	Aluminium (100...1kN)
	Stainless steel (1.5kN - 2 kN)
Case material	Anodised aluminium (Flange and bearing in AISI 303)


DIMENSION DETAILS



WIRING INFORMATION



If the transducer is supplied complete with prewired connection cable, the colour code is that indicated in the table.



CONNECTOR

Specifications are subject to change without notice

FORCE TRANSDUCERS FOR MEASURING THE WEB / SPINDLE TENSION

CALCULATION OF RESULTANT APPLIED TO CELL

F = Resultant		T = Tension in laminate		P = Roll weight	
The red point on the bearing support identifies the axis of maximum cell sensitivity and therefore the direction that F has to take with respect to the transducer.					
HORIZONTAL RESULTANT	VERTICAL RESULTANT	DOWNWARD RESULTANT	UPWARD RESULTANT		
$F = \frac{T}{2} \cdot 2 \cdot \cos \alpha$	$F = \frac{T}{2} \cdot 2 \cdot \cos \alpha + \frac{P}{2}$	$F = \frac{T}{2} \cdot 2 \cdot \cos \alpha + \frac{P}{2} \cdot \cos \beta$	$F = \frac{T}{2} \cdot 2 \cdot \cos \alpha - \frac{P}{2} \cdot \cos \beta$		
<p>This configuration gives the best performance because it does not consider roll weight.</p> <p>It is advised for low tension, to prevent roll weight from representing an excessive fraction of the resultant, with consequent reduction of the usable field.</p> <p>This is the only configuration in which, in the absence of tension T, there is a zero signal of approximately 0 mV/V.</p>		<p>In this configuration, roll weight is completely in the direction of maximum sensitivity of the cell that generates a signal in mV/V positive.</p> <p>This signal should be considered as tare: it will be considered during calibration of the instrument connected to the cell.</p>		<p>In this configuration, roll weight is completely in the direction of maximum sensitivity of the cell that generates a signal in mV/V negative.</p> <p>This signal should be considered as tare: it will be considered during calibration of the instrument connected to the cell.</p>	

ORDERING CODE

Force transducer

WT


MEASUREMENT RANGE (N)	
0 - 100	N1C
0 - 200	N2C
0 - 350	N3.5C
0 - 500	N5C
0 - 750	N7.5C
0 - 1000	N1M
0 - 1500	N15C
0 - 2000	N20C

EXTERNAL DIAMETER	
35 mm bearing	C35
40 mm bearing	C40
30 mm shaft spindle	P30

If request, it is possible to supply models with non-standard mechanical and/or electrical features.

FLANGE	
1	FLA 705 (standard)
2	FLA711
3	FLA715

The **GAMAN** series linear displacement pulsed probe is a spring loaded plunger type precision linear measurement sensor. Standard stroke length ranges are 25 and 50mm. It is a machined aluminum enclosure with smooth linear bearings for repeatable measurements. They have a wide range of applications in Production, Metrology, Multipoint Inspection Stations, Thickness / Stroke measuring equipment devices. The in-built electronics support interface with low cost PLCs, thus making precision measurement a low cost solution. Stand-alone indicators are also available as display for this sensor.

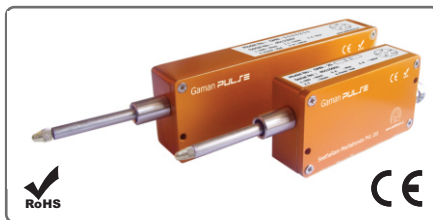

FEATURES

- Standard 10mm diameter mounting stem
- Compact design
- Linear ranges from 25mm to 50mm
- 12µm resolution (option 3 & 5µm)
- 5 Pin circular locking connector
- RS485 communication output



Displacement



Height



Thickness



Ovality



Displacement




Linear Encoder

MECHANICAL DATA	
Accuracy	12/6/3µm
Radial Force	1.66N
Fastening	Plane Surface
Operating Temperature	0-50°C
Protection	IP60
Weight without cable	350g
Mounting Screw	2-M3 x 0.5

ELECTRICAL DATA	
Power Supply	5VDC for TTL, 24VDC for MODBUS
Output	Default RS485 (MODBUS) Optional 5V TTL
Measuring Velocity	upto 15m/min
Electrical Connection	Cable 1.5m with free end wire Circular 5 Pin connector
Cable Length	1m

DIMENSION DETAILS

25/50

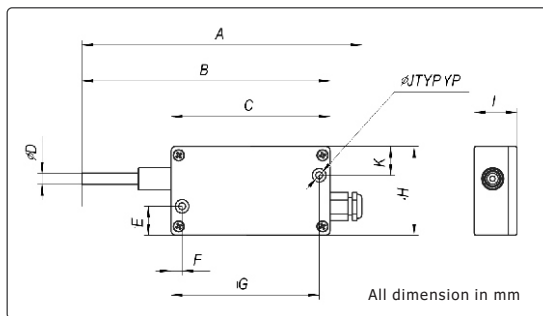




PIN CONFIGURATION

Free End Cable Wire	TTL Output	MODBUS Output
Brown	Power Supply +ve 5VDC	Power Supply +ve 24VDC
White	Power Supply -ve 0VDC	Power Supply -ve 0VDC
Green	A Signal	RS485 +ve
Yellow	B Signal	RS485 -ve
Grey	Index	GND


STROKE	A	B	C	ØD	E	F	G	H	I	ØJ	K
25	126.70	112.30	72.00	5.00	13.00	5.00	67.00	40.00	19.50	3.15	13.00
50	199.00	184.60	119.00	5.00	13.00	5.00	114.00	40.00	19.50	3.15	13.00

Specifications are subject to change without notice


MOUNTING CLAMP

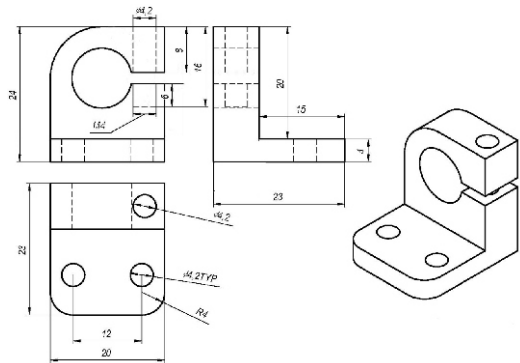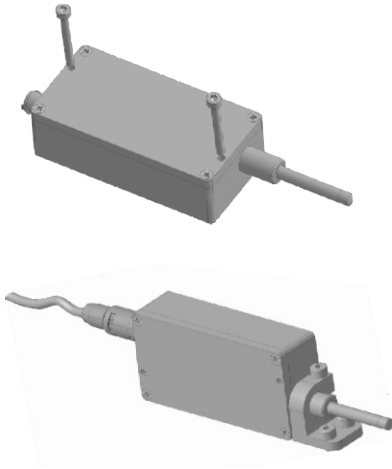


01




02



03




04




05



06



158



159-1

07

OPTIONAL ACCESSORIES	Ball Contact	Domed Contact	Flat Contact	Pin-Type Contact	Knife Edge Contact	Roller Contact	Adjustable Contact	Mounting Screws	Mounting Clamp
G.P 25/50	01	02	03	04	05	06	07	08	09

ORDERING NUMBER

GPT – Gaman Pulse TTL Output

GPM - Gaman Pulse MODBUS Output

GPT – ☐ – ☐ – ☐ – ☐

STROKE
25 = 25mm
50 = 50mm

ACCURACY
3 = 3µm
6 = 6µm
12 = 12µm

TERMINATION
F = CABLE
C = CONNECTOR

ACCESSORIES
BC = Ball Contact
DC = Domed Contact
FC = Flat Contact
PT = Pin-Type Contact
KE = Knife Edge Contact
RC = Roller Contact
AC = Adjustable Contact
MS = Mounting Screws
MC = Mounting Clamp


Specifications are subject to change without notice

3 AXIS INCLINOMETER

The 3-axis inclinometer is a high resolution (13-bit) device . The angle measured is transmitted in a high speed at a rate of 30 samples/sec. The data transfer is done through wireless communication. A 4-20 mA analog output port is also available.

FEATURES

- ABS UL-94HB housing
- Wireless serial communication
- 4-20 mA current output signal
- Temperature compensated
- Fast response time of 10 mS
- Standalone time 15 hours
- Easy to handle
- Optional external GLCD display and PC application
- Rechargeable battery



TECHNICAL SPECIFICATION

Conditions	Min	Max
Measurement range °	-260	260
Resolution °	1	
Output signal mA	4-20 mA	
Power supply VDC	5	
Current consumption mA	80	100
Operation temperature range °C	-40	100
Storage temperature range °C	-40	100
Weight g		165
Communication distance m	15	On Request
Dimension mm	125 x 70 x 38	

APPLICATIONS


- Alignment and level control
- Mobile and stationary cranes
- Elevators & Lifts
- Forklift truck
- Ship building
- Harvester
- Vehicle applications

FLANGED TYPE REACTION TORQUE TRANSDUCER

STDF reaction torque transducer is flange mount type designed for industrial and research applications. Both end flanges makes it very compact and easy to install into the applications. It is suitable for clock wise and anti clock wise directions

FEATURES


- Very compact and rugged for heavy duty applications.
- Compensated for axial and bending moments for good accuracy.
- Can be supplied as per customers required size and capacity.
- Both end shaft or one end shaft and other end flange type also can be supplied




APPLICATION

- Actuator/valve/electrical tool testing
- Axle/shaft torsion test
- Bearing friction measuring
- Testing of starters/slip rings/brushes/clutches/brakes
- Electric/hydraulic/pneumatic motors testing
- Alternators/pumps/gas, diesel, turbine engines testing
- Automobile testing of drive shaft and crank shaft torque
- Defence, Aerospace, R&D Establishments, Offshore test rigs, Automotive, machine tools, electrical and engineering industries.

WIRING INFORMATION



DIMENSION DETAILS

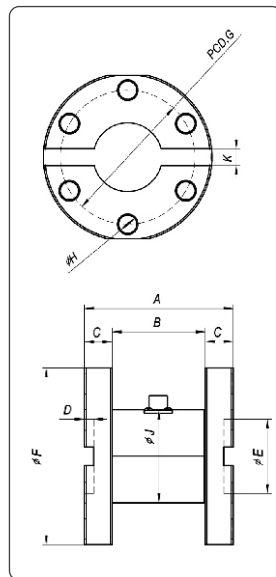

TECHNICAL SPECIFICATION

Model	STDF - (SPL)
Rated capacity (R.C.)	10Nm~2000Nm
Rated output (R.O.)	1mV/V ±1%
Non-linearity	0.3% (0.1kgf-m under 0.5% R.O.)
Hysteresis	0.3% (0.1kgf-m under 0.5% R.O.)
Repeatability	0.02% of R.O.
Terminal resistance, input	350Ω±1%
Terminal resistance, output	350Ω±1%
Insulation resistance	2000MΩ
Temp. effect on zero balance	±0.1%R.O./10°C
Temp. effect on rated output	±0.1%Load/10°C
Excitation recommended	10V DC
Safe overload	120% R.C.
Cable length	Ø5.5 4core cable, 3m

DIMENSION TABLE

Unit : mm


Capacity	A	B	C	D	ØE	ØF	G	ØH	ØJ	K
100, 200 Nm	80	50	15	5	40	95	78	10.5	50	10

Specifications are subject to change without notice

NON - ROTARY TORQUE TRANSDUCER

FEATURES


A static torque sensor for measurement of torque of stationery objects or within a certain angle of rotation. Suitable for torque measurement of various automobile parts, pneumatic and electric screwdriver etc.

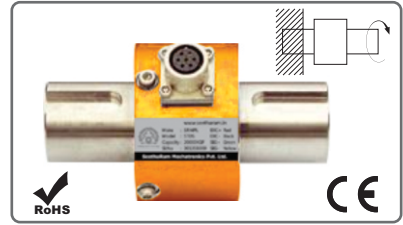


TECHNICAL SPECIFICATION

Model	STDS
Rated Capacity (R.C)	2kgf.cm ~ 100kgf.m
Rated output (R.O)	1mV/V \pm 1%
Non-linearity	0.3% of R.O.
Hysteresis	0.2% of R.O.
Repeatability	0.1% of R.O.
Excitation recommendad	10VDC
Temp. range, compensated	0.3% R.O./10°C
Temp. range, safe	0.2% Load/10°C
Safe overload	120% R.C.

WIRING INFORMATION



DIMENSION DETAILS

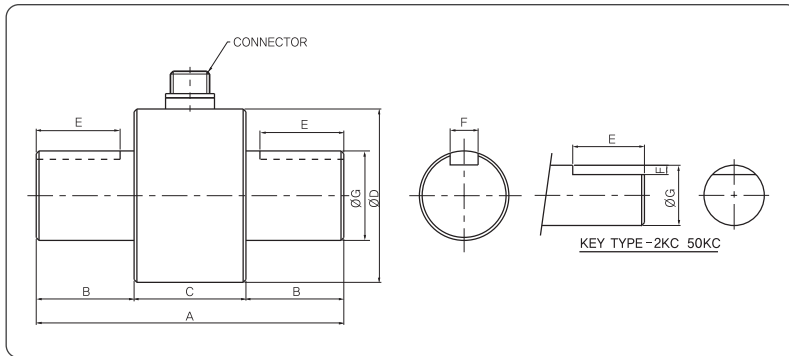

DIMENSION TABLE


Unit : mm

Capacity	A	B	C	ØD	E	F	G
2, 5, 10, 20 kgf.cm	75	20	35	34	15	1	8
30, 50 kgf.cm	75	20	35	34	15	1	12
1, 2 kgf.m	82	21	40	40	16	5x5	18
3, 5 kgf.m	82	21	40	43	16	5x5	18
10, 20 kgf.m	110	35	40	62	30	10x8	32
50, 100 kgf.m	155	55	45	84	50	12x8	47

NON - ROTARY TORQUE TRANSDUCER

FEATURES


A static torque sensor for measurement of torque of stationery objects or within a certain angle rotation. Suitable for torque measurement of various automobile parts. pneumatic and electric screwdriver etc.

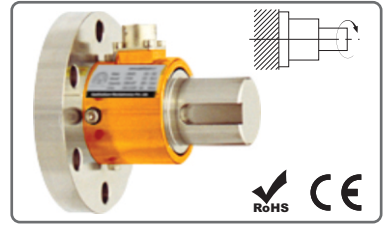


TECHNICAL SPECIFICATION

Model	STFS
Rated Capacity (R.C)	2kgf.cm ~ 100kgf.m
Rated output (R.O)	1mV/V \pm 1%
Non-linearity	0.3% of R.O.
Hysteresis	0.2% of R.O.
Repeatability	0.1% of R.O.
Excitation recommendad	10VDC
Temp. range, compensated	0.3% R.O./10°C
Temp. range, safe	0.2% Load/10°C
Safe overload	120% R.C.

WIRING INFORMATION



DIMENSION DETAILS

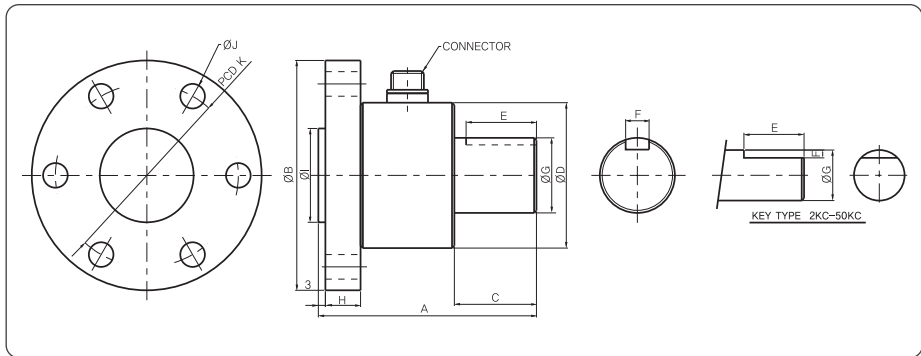

DIMENSION TABLE

Unit : mm

Capacity	A	B	C	D	E	F	G	H	I	J	K
2, 5, 10, 20 kgf.cm	63	58	20	34	15	1	8	5	20	4-Ø4.5	46
30, 50 kgf.cm	68	80	20	34	15	1	12	10	40	4-Ø6.5	66
1, 2, 3, 5 kgf.m	74	80	21	43	16	5x5	18	10	40	4-Ø6.5	66
10, 20 kgf.m	93	98	35	50	30	10x8	32	15	40	6-Ø10.5	78
50, 100 kgf.m	123	146	55	84	50	12x8	47	20	60	6-Ø13	115

ROTARY TORQUE DUAL SHAFT - RTDS (2kgf.cm ~ 2000kgf.m)

SHAFT TYPE ROTARY TORQUE TRANSDUCER


FEATURES

Model RTDS torque sensor measures the torque of continuous rotating object. Platinum coated connector provides long term signal stability and high accuracy. These models are most appropriate for industrial measurement. Applications include the performance testers for automotive components such as clutch, transmissions, motors and pumps.


Option: Foot mount.

TECHNICAL SPECIFICATION


Model	RTDS
Rated Capacity (R.C)	2, 5, 10, 20, 30, 50 kgf-cm 1,2,3,5,10,20,50,100,500,1000,2000kgf-m
Rated output (R.O)	1.5mV/V \pm 1% (2kgf-cm ~ 5kgf-m:1mV/V)
Non-linearity	0.3% R.O
Hysteresis	0.3% R.O
Repeatability	0.2% R.O
Excitation recommendad	10V
Terminal resistance	350 Ω \pm 5%
Insulation resistance bridge	200M Ω
Temp. effect on rated output	0.3% R.O./10°C
Temp. effect on zero balance	0.2% Load/10°C
Safe overload	120% R.C.
Cable length	Ø7.4 core cable 3m



WIRING INFORMATION



DIMENSION DETAILS

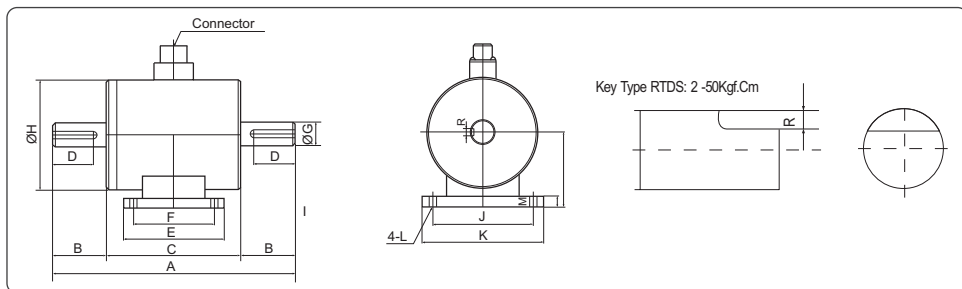

DIMENSION TABLE

Unit : mm															
Capacity	A	B	C	D	E	F	ØG	ØH	I	J	K	ØL	M	R	R.P.M
2, 5, 10, 20 kgf-cm	84	16	52	12	42	32	8	60	34	65	76	5.5	8	1	3000
30, 50 kgf-cm	84	16	52	12	42	32	12	60	34	65	76	5.5	8	1.5	3000
1, 2, 3 kgf-m	90	16	58	12	46	32	18	72	41	80	94	6.5	8.5	5x5	5000
5, 10 kgf-m	180	42.5	95	35	64	50	18	80	46	80	100	7	12	5x5	5000
20, 50 kgf-m	220	55	110	45	100	84	32	100	63	98	115	7	12	10x8	4000
100, 200 kgf-m	280	80	120	69	120	98	47	100	66	124	148	8.5	15	12x8	4000
500, 1000 kgf-m	390	130	130	100	126	100	90	172	101	154	180	11	20	25x14	2000
2000 kgf-m	440	150	140	120	148	110	115	210	130	190	228	13	23	32x18	2000

Specifications are subject to change without notice

ROTARY TORQUE DUAL SHAFT - RTDS1 (0.1Nm....20000Nm)


Contactless Torque Sensor, Rotating

FEATURES

- Nominal torque from 0.1N.m 20000 N.m
- Accuracy class optional 0.05%
- Active output ± 5 V
- Contactless data transmission
- Very short axial length
- Feather key groove on option.

TECHNICAL SPECIFICATION


Model	RTDS1
Accuracy Class	0.1% F.S
Repeatability	$\pm 0.02\%$
Excitation voltage	12...28V DC
Current consumption	max. 60 mA
Output signal	± 5 V
Output current max.	5 mA short circuit resist
Control signal excitation	$L < 2,0$; $H > 3,5$ V
Sample rate	10 kSample
Reference temperature	23°C
Nominal temperature range	5...45°C
Service temperature range	0...60°C
Storage temperature range	-10...70°C
Temp. coeff. of sensitivity	$\pm 0.01\%$ F.S.
Temp. coeff. of zero signal	$\pm 0.02\%$ F.S.
Service torque (static)	150% F.S.
Limit torque (static)	200% F.S.
Ultimate torque (static)	>300% F.S.
band width	70 (peak - peak)
Level of protection	IP50
Electrical connection	12 Pin series 581

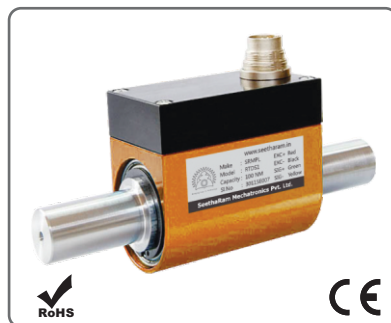

ELECTRICAL CONNECTION

12-PIN	RTDS1
Pin A	NC
Pin B	Opt. angle B
Pin C	Signal (+)
Pin D	Signal (GND)
Pin E	Supply (GND)
Pin F	Supply (+)
Pin G	Opt. angle A
Pin H	NC
Pin J	NC
Pin K	Control signal
Pin L	NC
Pin M	Shield

DIMENSION DETAILS

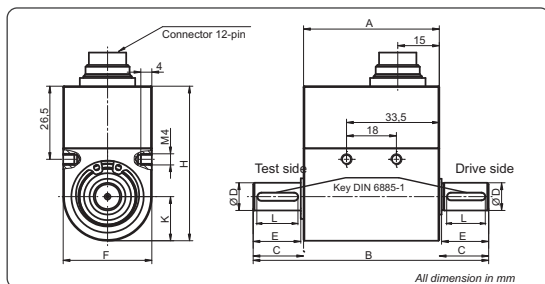

DIMENSION TABLE

Unit : mm


Measuring Range N.m	A	B	C	ØD	E	F	H	K	L	Key way
0.1, 0.2, 0.5, 1, 2, 5	49	85	18	8 g6	17	32	56	16	14	2 x 2 x 14
10	49	85	18	10 g6	17	32	56	16	14	3 x 3 x 14

Specifications are subject to change without notice

ROTARY TORQUE DUAL SHAFT - RTDS1 (0.1Nm....20000Nm)

ROTARY TORQUE TRANSDUCER

DIMENSION DETAILS

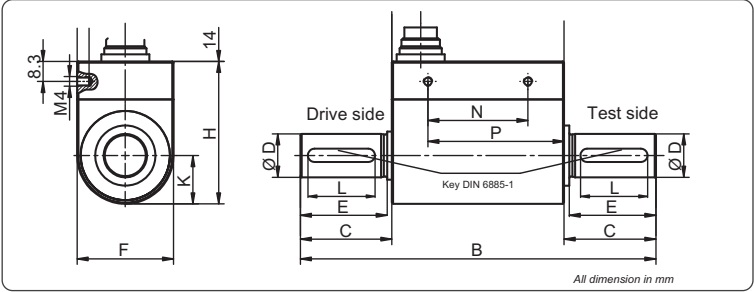


DIMENSION TABLE

Unit : mm

Measuring Range N.m	A	B	C	ØD	E	F	H	K	M	N	P	Q	L	Key way
20, 30	71.5	111.5	20	18 g6	18	40	59	20	5	41.5	56.5	12	14	6 x 6 x 14
50, 100	71.5	147.5	38	18 g6	36	40	59	20	5	41.5	56.5	12	30	6 x 6 x 30
200, 500	72.5	159.5	43.5	32 g6	38	58	76	29	6	29.5	51.5	15	36	10 x 8 x 36

DIMENSION DETAILS

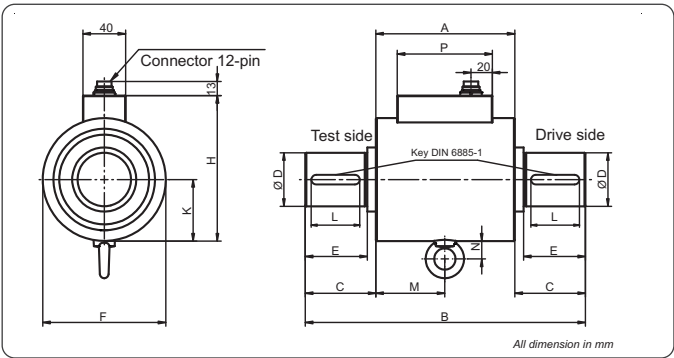

DIMENSION TABLE

Unit : mm

Measuring Range N.m	A	B	C	ØD	E	F	H	K	M	N	P	L	Key way
1000	130	262	66	50 g6	58	115	136	57.5	65.5	18	89	50	14 x 9 x 60
2000, 5000	135	377	121	70 g6	110	139	161	69.5	67.5	18	89	100	20 x 12 x 100
10000, 20000	190	470	140	110 g6	120	210	233	109	95	18	89	160	28 x 16 x 160



ROTARY TORQUE DUAL SHAFT - RTDS1 (0.1Nm....20000Nm)


ROTARY TORQUE TRANSDUCER

OPTION CALIBRATIONS

Description	Steps	Norm
Linearity diagram	25%	Factory standard
Linearity diagram	10%	
Proprietary calibration	3	VDI/VDE 2646
Proprietary calibration	5	
Proprietary calibration	8	
DKD - Calibration		on request

OPTION / ACCESSORIES

Description
Accuracy class 0.05% F.S.
Output signal ± 10 V
Speed/angle measurement, 2 x 360 impulses, 90° displaced, 5 V TTL
Speed measurement, 1 x 60 impulses, 5 V TTL
Female cable connector 12-pin series 581
Female angled connector 12-pin series 682
Connection cable, 3 m, 12-pin series 581, free soldered ends
Connection cable angled, 3 m, 12-pin series 682, free soldered ends
Feather key groove according DIN 6885 - on request

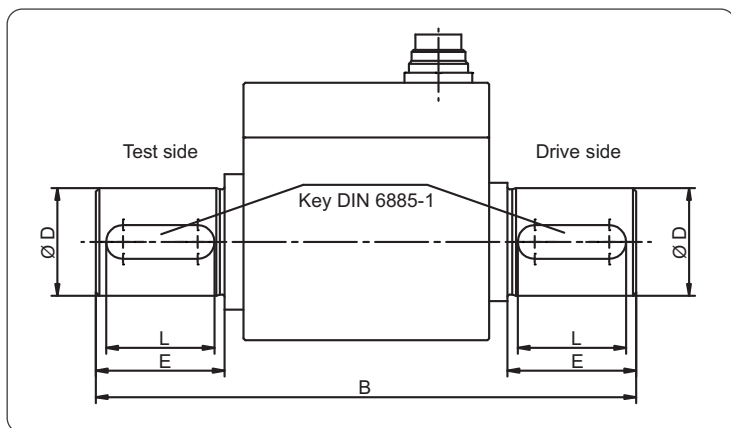

DIMENSION TABLE

Measuring Range N.m	B	ØD	E	L	Key Way
0.1, 0.2, 0.5, 1, 2, 5	85	8 g6	17	14	2 x 2 x 14
10	85	10 g6	17	14	3 x 3 x 14
20, 30	111.5	18 g6	18	14	6 x 6 x 14
50, 100	147.5	18 g6	36	30	6 x 6 x 30
200, 500	159.5	32 g6	38	36	10 x 8 x 36
1000	262	50 g6	58	50	14 x 9 x 50
2000, 5000	377	70 g6	110	100	20 x 12 x 100
10000, 20000	570	110 g6	170	160	28 x 16 x 160

Specifications are subject to change without notice

ROTARY TORQUE TRANSDUCER

FEATURES


- Contactless signal transmission
- Maintenance free
- Cut off frequency: 1KHz
- Active output signal $\pm 5V$, (Option $\pm 10V$)
- Dual Shaft without key

TECHNICAL SPECIFICATION


Model	RTDS2
Accuracy Class	0.25% F.S.
Repeatability	$\pm 0.05\%$ F.S.
Cut off frequency	1 KHz (-3 dB)
Supply Voltage	12...28 VDC
Output Signal	$\pm 5V$, (Option $\pm 10V$)
Current Consumption	max 50mA
Service torque	150% F.S.
Limit Torque	180% F.S.
Ultimate torque	>250% F.S.
Nominal temperature range	+5...+45 °C
Service temperature range	0...+60°C
Temperature coefficient of sensitivity	$\pm 0.02\%$ F.S/°C
Temperature coefficient of zero signal	$\pm 0.04\%$ F.S/°C
Level of protection (DIN 40 050)	IP50



WIRING INFORMATION



DIMENSION DETAILS

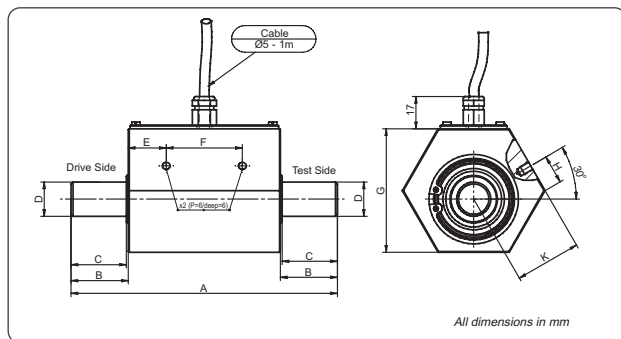

DIMENSION TABLE

Unit : mm										Threaded holes
Torque (Nm)	A	B	C	ØD	E	F	G	H	K	
0.2, 0.5, 1, 2	100	18	17	8 g6	14.5	35	46	8	26	M4
5, 10, 15*	100	18	17	10 g6	14.5	35	46	8	26	M4
20*, 50	140	30	29	18 g6	20	40	65	15	34.8	M5
100, 200	160	40	39	22 g6	20	40	65	15	34.8	M5

*It's not a regular model on request for extra price

Specifications are subject to change without notice

ROTARY TORQUE DUAL SHAFT - RTDS3 (0.1Nm....20000Nm)

ROTARY TORQUE TRANSDUCER

FEATURES

- Active output $\pm 5V$
- Sample rate 10 ksample
- Nominal torque from 0.1 N·m ... 20000 N·m
- Speed up to 15000 min⁻¹
- Very short axial length
- High torsional stiffness

TECHNICAL SPECIFICATION


Model	RTDS3
Accuracy Class	0.2 (0.1)% F.S
Repeatability	$\pm 0.02(\pm 0.04)\%$
Excitation voltage	12...28V DC
Current consumption	<60 mA
Output signal	0... $\pm 5V$
Output current max.	5 mA short circuit resist
Calibration control	L<2,0; H>3,5V
Sample rate	10 kSample
Reference temperature	+23°C
Nominal temperature range	+5...+45°C
Service temperature range	0...+60°C
Storage temperature range	-10...+70°C
Temp. coeff. of sensitivity	$\pm 0.01(\pm 0.015)\%$ F.S.
Temp. coeff. of zero signal	$\pm 0.02(\pm 0.03)\%$ F.S.
Service torque (static)	150% F.S.
Limit torque (static)	200% F.S.
Ultimate torque (static)	>300% F.S.
Band width	70 (peak - peak)
Level of protection	IP50
Electrical connection	12 Pin series
Speed control (Option)	6 Impulses
Output signal (Options)	0... $\pm 10V$



ELECTRICAL CONNECTION

8-PIN	RTDS3
Pin A	NC
Pin B	Opt. angle B
Pin C	Signal (+)
Pin D	Signal (GND)
Pin E	Excitation (GND)
Pin F	Excitation (+)
Pin G	Opt. angle A
Pin H	NC
Pin J	NC
Pin K	Calibration Control
Pin L	NC
Pin M	Shield

DIMENSION DETAILS

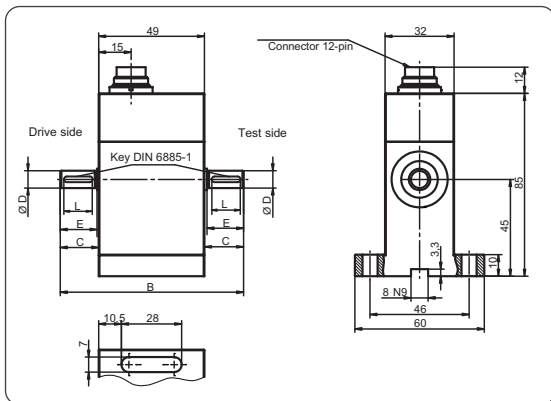

Specifications are subject to change without notice

ROTARY TORQUE DUAL SHAFT - RTDS3 (0.1Nm....20000Nm)


ROTARY TORQUE TRANSDUCER

DIMENSION TABLE

Dimensions : mm

Measuring Range	B	C	D	E	L	Key Way
0.1, 0.2, 0.5, 1	85	18	8g6	17	14	2 x 2 x 14

DIMENSION DETAILS

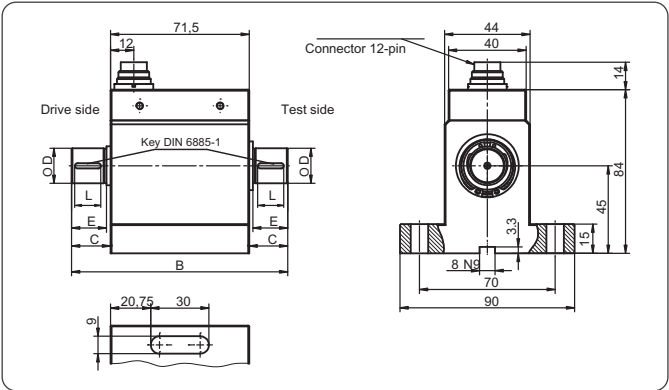


DIMENSION TABLE

Dimensions : mm

Measuring Range	B	C	D	E	L	Key Way
2, 5	107.5	18	8g6	17	14	2 x 2 x 14
10	107.5	18	10g6	17	14	3 x 3 x 14
20, 30	111.5	20	18h6	18	14	6 x 6 x 14
50, 100	147.5	38	18g6	36	30	6 x 6 x 30

DIMENSION DETAILS

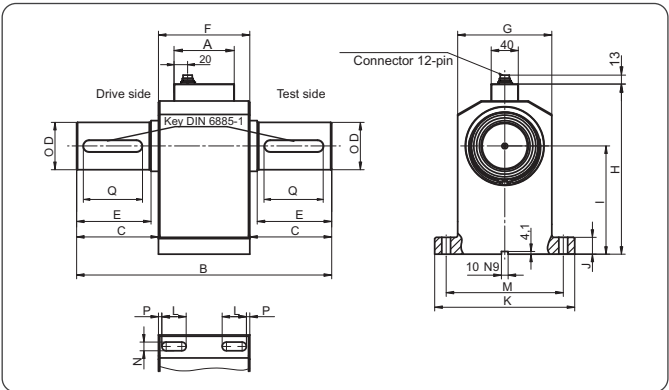


ROTARY TORQUE DUAL SHAFT - RTDS3 (0.1Nm....20000Nm)

ROTARY TORQUE TRANSDUCER

DIMENSION TABLE

Dimensions : mm

Measuring Range	A	B	C	ØD	E	F	G	H	I	J	K	L	M	N	P	Q	Key Way
200, 500	89	217	43.5	32 g6	38	130	115	190.4	112	20	175	30	145	11	5	36	10 x 8 x 36
1000	89	262	66	50 g6	58	130	115	190.4	112	20	175	30	145	11	5	50	14 x 9 x 50
2000*, 5000*	89	377	121	70 g6	110	135	139	251.5	160	25	207	36	173	13	5	100	20 x 12 x 100
10000*, 20000*	89	470	140	110 g6	120	190	210	343	215	40	300	45	260	17	15	160	28 x 16 x 160

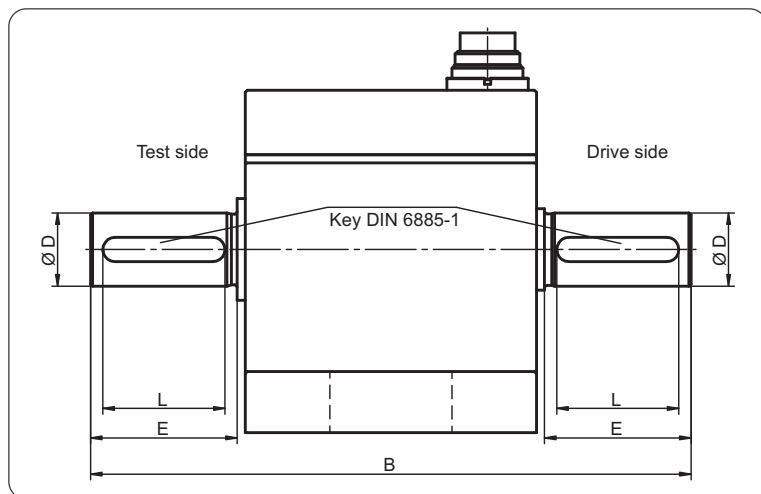

DIMENSION DETAILS

Measuring Range N.m	B	ØD	E	L	Key Way
0.1, 0.2, 0.5,	85	8 g6	17	14	2 x 2 x 14
1, 2, 5	107.5	8 g6	17	14	2 x 2 x 14
10	107.5	10 g6	17	14	3 x 3 x 14
20, 30	111.5	18 g6	18	14	6 x 6 x 14
50, 100	147.5	18 g6	36	30	6 x 6 x 30
200, 500	217	32 g6	38	36	10 x 8 x 36
1000	262	50 g6	58	50	14 x 9 x 50
2000, 5000	377	70 g6	110	100	20 x 12 x 100
10000, 20000	570	110 g6	170	160	28 x 16 x 160

Specifications are subject to change without notice

ROTARY TORQUE DUAL FLANGE - RTDF

(20kgf.m ~ 500kgf.m)


ROTARY TORQUE TRANSDUCER

FEATURES


Model RTDF slipring rotating torque transducers have flange drives at both ends. This model is designed for the application with minimal space and high capacity requirement.

TECHNICAL SPECIFICATION


Model	RTDF
Rated Capacity (R.C)	20kgf.m ~ 500kgf.m
Rated output (R.O)	1.5mV/V ± 1%
Non-linearity	0.3% of R.O.
Hysteresis	0.3% of R.O.
Repeatability	0.3% of R.O.
Terminal resistance, input	350Ω ± 5Ω
Terminal resistance, output	350Ω ± 3Ω
Insulation resistance	300MΩ
Temp. range, compensated	-10°C ~ 60°C
Temp. range, safe	-20°C ~ 70°C
Temp. effect, on zero balance	0.08% R.O./10°C
Temp. effect, on rated output	0.08% Load/10°C
Excitation recommended	10VDC
Safe overload	150% R.C.
Cable	Ø7 Shield 3m

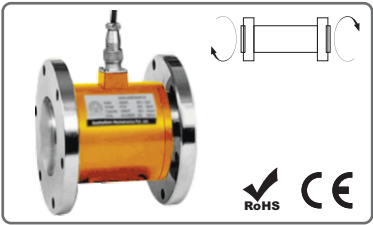

WIRING INFORMATION



DIMENSION DETAILS

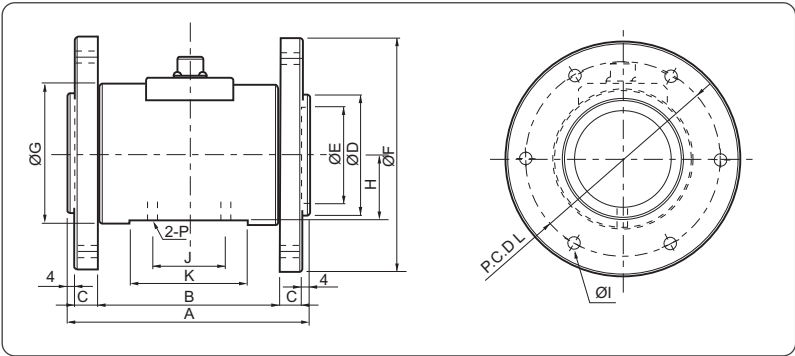

DIMENSION TABLE

Unit : mm														
Capacity	A	B	C	ØD	ØE	ØF	ØG	H	I	J	K	L	P	R.P.M
20kgf-m	130	98	12	65	52	127	81	38	6-Ø6.5	50	64	105	M6 DP.8	5,000
50kgf-m	134	102	12	76	62	136	88	41.5	6-Ø8.5	40	64	114	M6 DP.8	4,000
100kgf-m	134	102	12	86	68	156	100	48	8-Ø10.5	48	64	130	M8 DP.8	4,000
200, 300kgf-m	148	108	16	102	75	172	116	56	8-Ø10.5	50	68	146	M8 DP.8	3,000
500kgf-m	150	102	16	107	81	184	128	62	8-Ø10.5	56	74	158	M8 DP.8	3,000

Specifications are subject to change without notice



ROTARY TORQUE SOCKET WRENCH - RTSW (2kgf.cm ~ 3000kgf.cm)

SOCKET WRENCH TYPE ROTARY TORQUE TRANSDUCER

FEATURES


- Model RTSW socket wrench torque sensors are used for fast, accurate measurement of bolt or nut wrenching torques.
- This model operates in both directions so tightening and break-away torques can be measured.
- It can also be used to check the calibration of mechanical torque wrenches.

TECHNICAL SPECIFICATION


Model	RTSW
Rated capacity (R.C)	2kgf.cm ~ 3000kgf.cm
Rated output (R.O)	1.3mV/V $\pm 1\%$
Non-linearity	0.3% R.O.
Hysteresis	0.3% R.O.
Repeatability	0.3% R.O.
Terminal resistance, input	350 \pm 3.5 Ω
Terminal resistance, output	350 \pm 3.5 Ω
Insulation resistance	300M Ω
Temp. range, compensated	-10°C~60°C
Temp. range, safe	-20°C~70°C
Safe overload	150% R.C.
Temp. effect on zero balance	0.05% R.O/10°C
Temp. effect on rated output	0.1% Load/10°C
Excitation recommended	10V DC
Safe overload	150% R.C.
Cable	Ø4 shield 3m



DIMENSION DETAILS

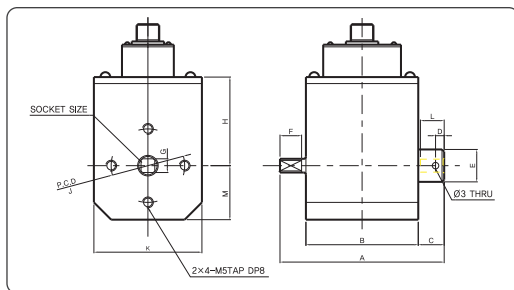

WIRING INFORMATION



DIMENSION TABLE

Unit : mm

Capacity	Socket Size	A	B	C	D	ØE	F	G	M	K	L	J	H
2, 5, 10 kgf.cm	1/4"	76	52	12	4	15	10	6.35	25	50	11	34	41
20, 50 kgf.cm	3/8"	82	56	12	4	15	12.5	9.53	25	50	13	34	41
100, 300 kgf.cm	1/2"	96	58.5	19.5	7	20	16	12.7	31	62	17	44	42
500, 1000 kgf.cm	3/4"	106	58	24	10	30	22	19.1	34	68	22	52	53
2000, 3000 kgf.cm	1"	123	58	33	14	40	29.2	25.4	39	78	28	62	54

Specifications are subject to change without notice

ROTARY TORQUE SOCKET WRENCH - RTSW (M) (1Nm 5000 Nm)

SOCKET WRENCH TYPE ROTARY TORQUE TRANSDUCER

FEATURES

- Nominal torque from 1 N·m ... 5000 N·m
- High accuracy 0.1% f. scale
- Drive-square socket
- Output-square drive
- Very short axial length
- High torsional stiffness
- Reliable and durable
- Simple handling and assembly
- Special versions on request



TECHNICAL SPECIFICATION

Model	RTSW (M)
Accuracy Class	0.1% F.S
Repeatability	±0.05% F.S
Excitation Voltage	12 VDC(max 15VDC)
Bridge resistance	350Ω
Sensitivity	1mV/V(1N.m;0.5mV/V)±0,1%
Reference temperature	23°C
Nominal temp. range	5 50°C
Service temp. range	-10 60°C
Temperature coeff. of zero signal	±0.04% F.S./K
Temperature coeff. of sensitivity	±0.02% F.S./K
Service torque	150% F.S.
Limit torque	200% F.S.
Ultimate torque	>300% F.S.
Durability of brushes	5x10 ⁷ Rev
Band width	70% F.S (Peak to Peak)
Level of protection	IP50
Electrical Protection	6Pin


ELECTRICAL CONNECTION

6 Pin Connector

Pin 1 - Exc(-) Pin 4 - Sig(+)

Pin 2 - Exc(+) Pin 5 - Sig(-)

Pin 3 - Shield Pin 6 - Control Signal





Top View

OPTION

- Control signal 100% F.S

DIMENSION DETAILS

Torque Range: 1, 2, 5, 12 Nm
Square : 1/4"

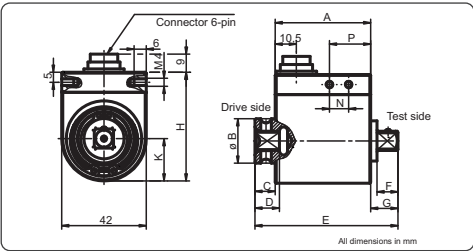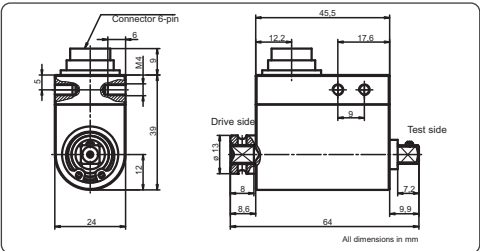

ROTARY TORQUE SOCKET WRENCH - RTSW (M) (1Nm 5000 Nm)


SOCKET WRENCH TYPE ROTARY TORQUE TRANSDUCER

DIMENSION TABLE

Unit : mm

Torque (Nm)	Square	A	ØB	C	D	E	F	G	H	K	L	N	P
25/63	3/8"	47.4	22	10.1	12.2	71	10.4	13.5	54	21	42	9.5	20.5
100/160/120	1/2"	47.4	29.8	10.7	15	76	15.1	17.9	54	21	42	9.5	20.5

DIMENSION DETAILS

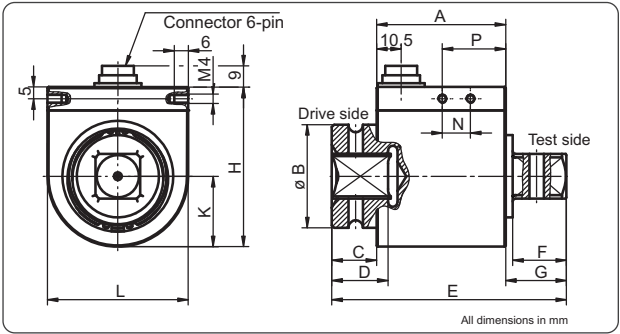


DIMENSION TABLE

Unit : mm

Torque (Nm)	Square	A	ØB	C	D	E	F	G	H	K	L	N	P
500	3/4"	55	44	19	24	100	22.9	26	68	30	60	12	27
1000	1"	55	54	33	27	132	27.4	44	68	30	60	12	27

DIMENSION DETAILS

Torque Range: 2000, 5000 Nm
Square : 1 1/2"

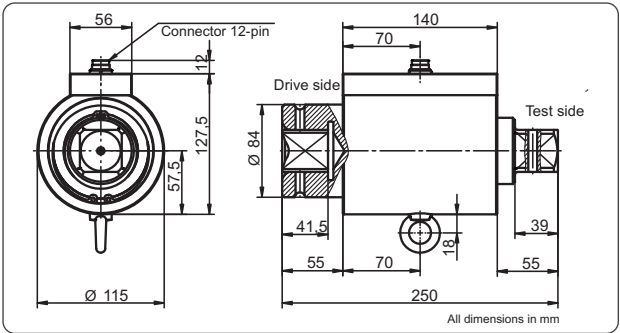

SLIPRING TYPE ROTARY - RTDS (M)

(1Nm 500 Nm)

SLIPRING TYPE ROTARY TORQUE TRANSDUCER

FEATURES

- High accuracy 0.1% F.S.
- Both shaft ends with keys
- Very short axial length
- High torsional stiffness
- Reliable and durable
- Simple handling and assembly

TECHNICAL SPECIFICATION

Model	RTDS (M)
Accuracy Class	0.1% F.S
Repeatability	±0.05% F.S.
Excitation Voltage	2...12 Vcc
Sensitivity	1mV/V for (1NM:0.5)±0.1%
Bridge resistance	350Ω
Reference Temperature	23°C
Nominal temp. range	+5 +50°C
Service temp. range	-10 ... +60°C
Temperature coeff. of sensitivity	±0.02% /°C
Temperature coeff. of zero	±0.04% /°C
Service torque	150% F.S.
Limit torque	200% F.S.
Ultimate torque	300% F.S.
Durability of brushes	5x10 ⁷ , tr/min
Level of protection	IP 50
Connector	6 Pin




ELECTRICAL CONNECTION

6 Pin Connector

Pin 1 - Exc(-) Pin 4 - Sig(+)


Pin 2 - Exc(+) Pin 5 - Sig(-)

Pin 3 - Shield Pin 6 - Control Signal




DIMENSION DETAILS

Torque Range: 1, 2, 5, 10 Nm

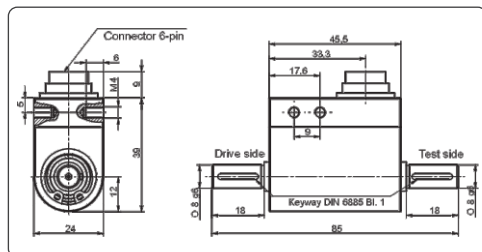

Torque Range: 20, 50, 100, 200, 500Nm

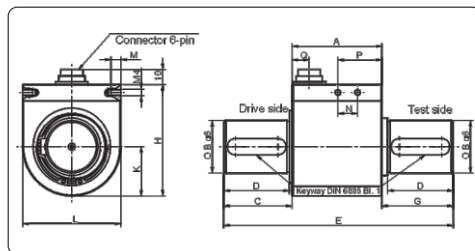

DIMENSION TABLE

Unit : mm

Torque (Nm)	A	B	C	D	E	G	H	K	L	M	N	P	Q
20, 50	47.4	15	21.1	20	90	21.5	54	21	42	6	9.5	11	10.5
100	47.4	18	24	22	95	23.6	54	21	42	6	9.5	11	10.5
200, 500	55	32	41.6	40	140	43.4	68	30	60	6	27	12	10.5

STATIC TORQUE SOCKET WRENCH - STSW (2kgf.cm ~ 1000kgf.cm)


NON - ROTARY TORQUE TRANSDUCER

FEATURES


- Adaptable for portable usage
- No special adapter tools required
- Precision repeatable torque measurements
- Calibration reference for 'hard usage' mechanical torque wrenches

TECHNICAL SPECIFICATION


Model	STSW
Rated Capacity (R.C)	2,5,10,20,50,100,200,500,100kgf-cm
Rated output (R.O)	1mV/V \pm 1%
Non-linearity	0.3% of R.O.
Hysteresis	0.3% of R.O.
Repeatability	0.2% of R.O.
Excitation recommended	10VDC
Terminal resistance, input	350 Ω \pm 30 Ω
Terminal resistance, output	350 Ω \pm 2 Ω
Insulation resistance bridge	2000M Ω
Temp. range, compensated	-10°C ~ 60°C
Temp. range, safe	-10°C ~ 80°C
Safe overload	120% R.C.
Cable length	Ø5, 4core 5m



DIMENSION DETAILS

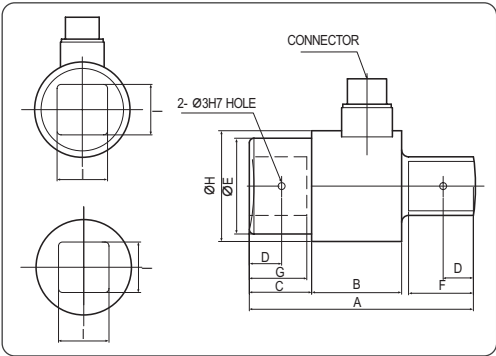

WIRING INFORMATION



DIMENSION TABLE

Capacity	A	B	C	D	ØE	F	G	ØH	I
2 kgf-cm	58	33	12	4	14	11	11	28	6.35
5, 10kgf-cm	60	33	13	5.5	16.5	12.5	12	28	9.53
20, 50kgf-cm	60	33	13	5.5	16.5	12.5	13	28	9.53
100, 200 kgf-cm	71	37	16	7	22	16	17	28	16
500, 1000kgf-cm	98	39	27	14	41.5	29	27	48	25.4

Specifications are subject to change without notice


REACTIVE TORQUE TRANSDUCER

FEATURES


- Active output signal $\pm 5V$
- Sample rate 5 ksampl per channel

TECHNICAL SPECIFICATION


Model	STWC
Rated capacity (R.C)	1000, 2000kgf.cm
Rate output (R.O)	1.5mV/V
Non-linearity	$\leq 0.3\%$ R.O
Hysteresis	$\leq 0.3\%$ R.O
Non-repeatability	$\leq 0.3\%$ R.O
Terminal resistance, input	$350\Omega \pm 1\%$
Terminal resistance, output	$350\Omega \pm 1\%$
Insulation resistance	2000M Ω
Temp. effect on rated output	$\leq 0.05\%$ LOAD/ $10^{\circ}C$
Temp. effect on zero balance	$\leq 0.05\%$ R.O./ $10^{\circ}C$
Excitation Voltage	10V DC
Safe overload	150% R.C.
Cable	$\phi 7$ shield 5m



WIRING INFORMATION



DIMENSION DETAILS

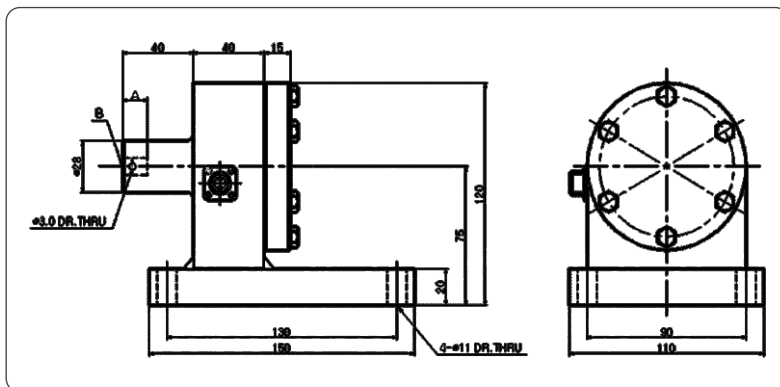

DIMENSION TABLE

Dimensions : mm


Capacity	Socket size	A	B
1000 kgf.cm	3/8"	14	9.53
2000 kgf.cm	1/2"	17	12.7

SIGNAL CONDITIONER FOR POTENTIOMETRIC TRANSDUCER

The UNI-POT signal conditioners have been designed to enable the user to adapt the output impedance of linear or rotative displacement transducers Potentiometric with acquisition systems or PLC, in a way that does not alter the linearity of the transducer itself.

FEATURES


- High impedance input >80Mohm
- Voltage output 0...10V
- Linearity error <0.03% full scale output
- Low thermal drift 0.01% full scale /°C
- Suitable for DIN rail mounting En50022



TECHNICAL SPECIFICATION

Model	UNI-POT
Linearity error	< 0.03% FSO
Transducer resistance	1...20kΩ
Input Impedence of cond.	> 80MΩ
Output load resistance	> 10kΩ
Supply voltage	20...32Vdc
Current drain	<60mA
Supply voltage to transducer	10Vdc
Zero signal accuracy	±0.1% FSO
Full scale output	10Vdc
Full scale output accuracy	±0.1% FSO
Inverse polarity protection	Yes
Response time (10...90% FSO)	<6ms
Typical thermal drift of zero	±0.01% FSO/°C
Typical thermal drift of span	±0.01% FSO/°C
Case material	Polyamide
IP Protection Class	IP40
Weight (g)	55

DIMENSION DETAILS



ELECTRICAL CONNECTION

1	2	1 - Power Supply
3	4	2 - GND
5	6	3 - EXC +ve
7	8	4 - EXC -ve
		5 - SIG
		6 - NC
		7 - OUT +ve
		8 - OUT - ve

OTHER PRODUCTS

POWER CARD



POTENTIOMETER



DUPOT



SANKET - S, S1, S4, S5 SERIES


STRAIN GAUGE SIGNAL CONDITIONER

Conditioning electronics SANKET - S Series can be connected to strain gauge transducers (load cells, pressure transducers, torque meters and Wheatstone bridges with strain gauges).

SANKET - S Series are to be externally fed power supply, they feed power supply to connected transducer and condition its analog signal by giving an easy to calibrate amplified output.

FEATURES


- SANKET feeds power supply to connected transducer and amplifies its signal.
- Many types of outputs: voltage and current.
- Easy to calibrate: by means of zero and gain trimmers.
- Compact: small dimensions allow many applications.
- Easy connections: by means of extractable screw terminal boards.



TECHNICAL SPECIFICATION

MODEL	SANKET S1	SANKET S4	SANKET S5
Output	0 to ± 10 Vdc	4-20mA 2 wires	0 to ± 5 Vdc
Input Signal	± 80 mVdc differential		
Card Power Supply	18-28Vdc filt. stab	12-40Vdc filt. stab	10.5-28Vdc filt. stab
Transd. Power Supply	15Vdc	1Vdc	8Vdc
Zero	$\pm 100\%$ F.S		
Gain	0 to 1000		
Temperature	-40 up to $+85^{\circ}\text{C}$		

DIMENSION DETAILS

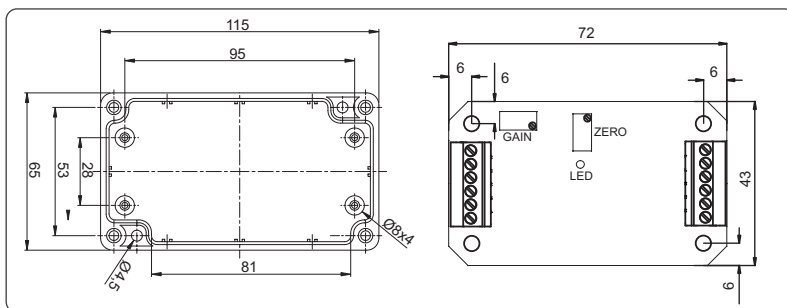

CALIBRATION:

Zero and gain trimmers are used for calibration and a LED is signaling when SANKET - S Series is powered.

PROTECTION AGAINST ELECTROMAGNETIC NOISE:

SANKET - S Series allow to amplify analog low amplitude signals from connected transducers and to transmit them far away even in electrically noised environment and to recover the drop of voltage on connection cables.

LOAD RESISTANCE:


SANKET - S4(4-20mA 2 wires) needs an external load resistance (not included) to be applied in series to one of the two power supply conductors (typically $R_L=250$ Ohm with 24Vdc power supply).

SANKET - S DIN-RAIL SERIES UNIVERSAL

Universal signal conditioners amplify and condition all varieties of strain gage based sensors, delivering highly accurate signal outputs. Sensors may be connected in 4-, & 6-wire configurations. The modules offer adjustable excitation to energize load cells. Current limiting provides extra protection.

FEATURES

- Accepts signals from strain gages, load cells, torque Transducers and pressure transducers.
- 120 to 1000Ω bridge resistance
- User selectable sensor excitation 5V, 10V
- Zero and span adjustment by trim pot
- User selectable output options 0-5 V, 0-10 V and 4-20 mA

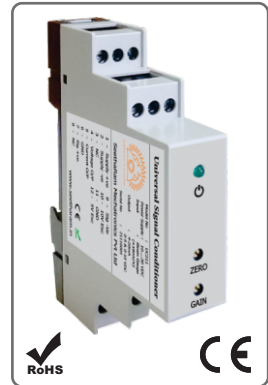


TECHNICAL SPECIFICATION

Model	UC211
Input signal	±80 mV
Output load resistance	350 ohm±20 ohm
Supply voltage	15...30VDC
Current drain with sensor connected	60mA
Supply voltage to transducer	5VDC or 10 vdc
Output signal at zero	0 VDC or 4mA
Zero signal accuracy (FSO)	<±1%
Zero adjustment (FSO)	>±15%
Full scale output	±10 VDC, ±5 VDC, 4-20mA
F.S. output accuracy	<±0.1%
Span adjustment	>±15%
Inverse polarity protection	YES
Shortcircuit protection	YES
Temp. range: (%FSO) compensated	0-60°C
Working	-10 ~ 80°C
Storage	-50 ~ 100°C
Case material	PC - GF, light grey RAL 7035
	Base plate: dark black RAL 9005
Grade of protection	IP40

ELECTRICAL CONNECTION

1 - Supply +ve	7 - Sig +ve
2 - Supply -ve	8 - NC
3 - NC	9 - Sig -ve
4 - Voltage O/P	10 - 10V Exc
5 - Current O/P	11 - GND
6 - GND	12 - 5V Exc

DIMENSIONAL DETAILS



WIRELESS MODBUS MODULE

FEATURES


- 868MHz Low Power long range RF
- Provides RS-485 and USB Interfaces.
- Multiple power input design
- Extended network range and coverage.
- Easy maintenance and field installation.



TECHNICAL SPECIFICATION

Model	WM-TX
Power Consumption	<1W
Power Input	10-30V
Protocol	Modbus RTU
Connectors	Screw Terminal
Wireless Communication	
ISM Band	868 MHZ
Modulation Type	GFSK
Frequency Band	863-870 MHZ
f RF Data Rate	Serial Data Rate: Up to 115.2 Kbps
Transmit Power	27 dBm
Receiver Sensitivity	-117 dBm
Topology	Star/Point to Point
Outdoor Range	>1 Km with line of sight
Network Capacity	16 nodes
f Storage Temperature	-40°C~ 85°C (-40°F ~ 184°F)
f Operating Humidity	20~95% RH
Storage Humidity	0~95% RH

DIMENSIONAL DETAILS



POWER CARD

FEATURES

- Din rail mounting.
- Compact size - 8.8mm width


APPLICATIONS

Power supply for


1. Strain based sensor (Load cell, Torque, Pressure)
2. Potentiometric sensors
3. Photo sensors
4. Drives and Actuators

TECHNICAL SPECIFICATION


Model	Power Card	
Power Supply	20....32V DC	
Constant Output Voltage	5V DC@20mA	10V DC@20mA
	12V DC @1A	15V DC @1A
Auto cut off protection for input over voltage	Upto 32V DC	
Input Reverse Polarity Protection	Yes	
Output Short Circuit	Yes	
Case material	Polyamide	
IP Protection Class	Ip40	
Weight (g)	35	



ELECTRICAL CONNECTION



DIMENSION DETAILS

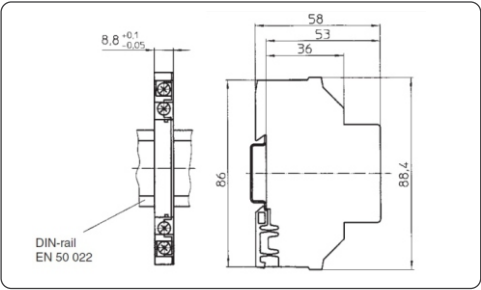

ORDERING DETAILS

- PC 108 - 01 5V DC@20mA
- PC 108 - 02 10V DC@20mA
- PC 108 - 03 12V DC@1A
- PC 108 - 04 15V DC@1A

OTHER PRODUCTS

LOAD CELLS



TORQUE TRANSDUCERS



DISPLACEMENT SENSORS



KOAL TOUCH

INDICATOR CONTROLLER

KOAL Touch series is designed specifically to work with strain sensors / Analog input / Encoders / LVDT. The setup sequence is simple and quick. It supports fast and high resolution measurements. The 2.8 inch resistive touch screen display is an impressive and user friendly interface for navigating the settings and menus. KOAL Touch can be used as Indicator Controllers for Industrial Press, Testing Machine, and SPMs etc.

FEATURES

- TFT 320 X 240 (2.8") Resistive touch screen multi-colour display.
- Easy to understand; User friendly special icons; Password protection for settings,
- User configurable input sampling and display update speed
- Nonvolatile memory retains all programmable parameters and display values.
- RS232 and RS 485 communication port for PC interface.
- Remote Peak & Tare option; Engineering unit selections.
- Soft Calibration by sensor rated value or actual / field load.


TECHNICAL SPECIFICATION

INPUT CHARACTERISTICS	
Power Supply	12 ~ 35V DC
Excitation for sensor	+5VDC @ 50mA $\pm 1\%$, +10VDC @ 50mA $\pm 1\%$, +24VDC
Input signal	KT - S Up to 8mV/V (Strain Gauge Sensors) KT - A 0-10VDC & 0-20mA (Potentiometer, Pressure & other Amplified Output Sensors) KT - G Digital & KT - E 5V TTL
Decimal point	1~3 Points user selectable (X.X, X.XX, XX.XX & X.XXX)
Input sampling	1 ~ 32 Samples Per Sec User configurable (ADC > 1000 Samples Per Sec)
A/D Converter	24 bit resolution
Option	Additional Analog Input - Voltage or Current (Launching Soon) 24V TTL (Consult Factory)


DISPLAY CHARACTERISTICS	
Display	2.8 inch TFT, Touch Screen, Color
Display update speed	1 ~ 32 Samples Per Sec User Configurable

OUTPUT CHARACTERISTICS	
Relay output	2 Relay (5A/230VAC) Standard
Analog signal	0- ± 10 VDC, 0- ± 5 VDC, 4-20mA, 0-20mA User selectable
Communication interface	RS-232, RS-485, USB (Optional)
Option	PWM output, 4 Relay output, PC Suite Software for Data Logging


GEOMETRICAL CHARACTERISTICS	
Termination	PCB terminal block
Wire Strip Length	9mm
Wire Gauge Capacity	24 to 14 AWG (0.2 to 2.08 mm ²)
Torque	0.4-0.5 N-m
Ingress Protection	IP40 Enclosure rating
Operating temperature (°C)	0 - 50
Storage temperature (°C)	-10 - 60
Case dimension (mm)	96*96*85
Weight (g)	500



Pin Configuration

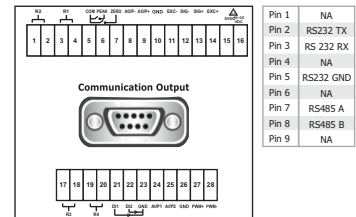


PC Suite (Optional)

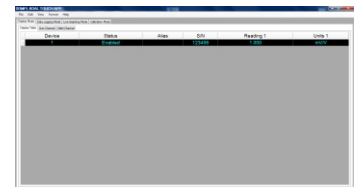


Specifications are subject to change without notice

INDICATOR CONTROLLER


DIMENSIONAL DETAILS




PANEL CUTOUT



MOUNTING ACCESSORIES



ORDERING NUMBER

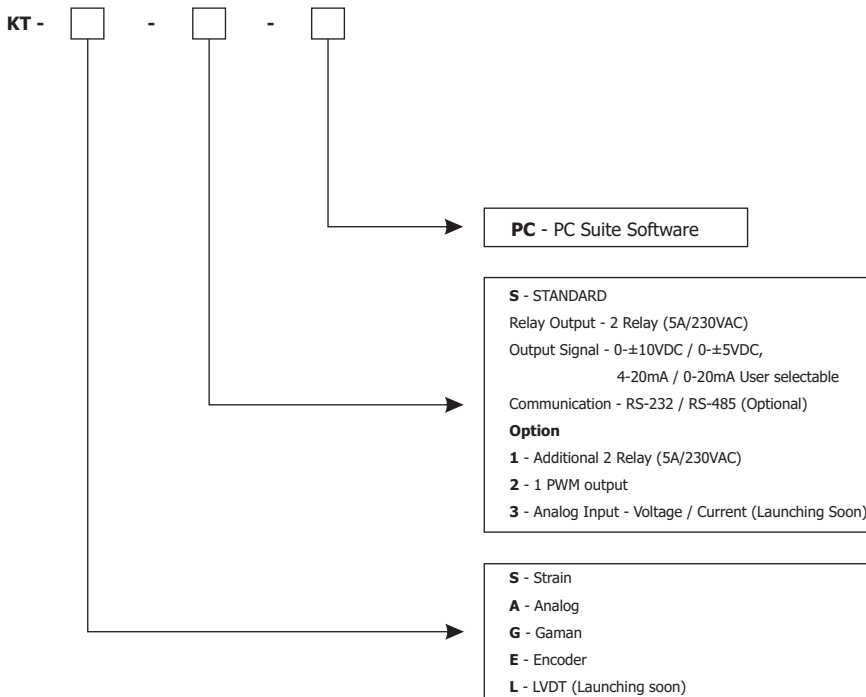

Example:

KT-A-1 : Analog measurement, Additional 2 relay (inclusive of standard output).

KT-S-S-PC : Strain measurement, Standard outputs and PC Suite Software.

HANDHELD INDICATOR CONTROLLER LOGGER

Designed specifically to work with strain sensor and Analog inputs. The setup sequence is simple and quick. It supports fast and high resolution measurements. The 2.8 inch resistive touch screen display is an impressive and user friendly interface for navigating the settings and menus.

FEATURES

- Single input indicator, controller, logger.
- Stand-alone or PC Comparable logger.
- Password protection for settings.
- User configurable input sampling and display update speed
- Nonvolatile memory retains all programmable parameters and display values.
- RS 485 communication port for PC interface.
- TFT 320X240 display.
- Engineering unit selections.
- Calibration by sensor value and actual load.



TECHNICAL SPECIFICATION


□ INPUT CHARACTERISTICS	
Power Supply	12 ~ 35V DC
Excitation for sensor	+5VDC @ 50mA ±1%, +10VDC @ 50mA ±1%
Input signal	±80mV/V, 0-10VDC / 0~4-20mA
Decimal point	1~3 Points user selectable (X.X, X.XX, X.XXX)
A/D Converter	24 bit resolution

□ DISPLAY CHARACTERISTICS	
Display	2.8 inch TFT, Touch Screen, Color
Display update Speed	1 ~ 32 Sec User Configurable

□ OUTPUT CHARACTERISTICS	
Relay output	1 Relay (5A/230VAC)
Analog signal	0~±10VDC, 0~±5VDC, 4-20mA, 0-20mA User selectable
Communication Interface	RS-485 PC Suite Software

□ GEOMETRICAL CHARACTERISTICS	
Termination	PCB terminal block
Wire Strip Length	9mm
Wire Gauge Capacity	24 to 14 AWG (0.2 to 2.08 mm ²)
Torque	0.4 - 0.5 N-m
Ingress Protection	IP40 Enclosure rating
Operating temperature (°C)	0-50
Storage temperature (°C)	-10 ~ 60
Case dimension (mm)	130 x 90 x 40
Weight (g)	500

DIMENSIONAL DETAILS

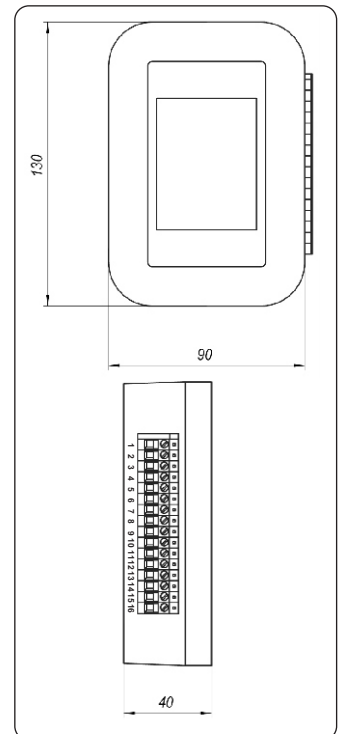


HANDHELD INDICATOR CONTROLLER LOGGER

MOUNTING ACCESSORIES EASY WALL MOUNTING

- Easy mounting onto the wall or bracket by opening the blind lids.
- Blind lids cover wall-mounting screws and make neat looks.



POLE MOUNTING BRACKETS

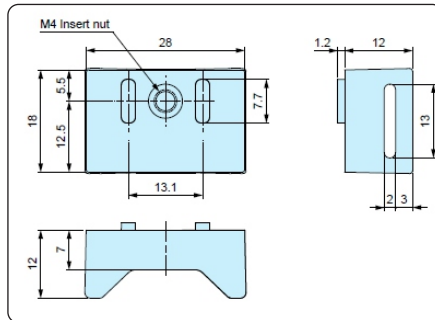

MEYA TEMPERATURE


The Meya temperature is a four-channel touch screen data logger that accepts four thermocouple inputs. Each channel has individually configurable HI/LO alarms. The intuitive touch screen interface allows each channel to be configured separately for alarm. Three types of logging available – scheduled, Alarm and manual log. All four channels can be displayed and logged simultaneously or individually.



FEATURES

- Four K-type Thermocouple Inputs.
- Handheld logger
- Display and Log All 4 Channels Simultaneously or Individually
- Scheduled, Alarm and Manual Logging.
- 4 GB SD Card Stores Up to 1 Year of Data
- Battery or Mains Powered (With Adaptor)
- Touch Screen with Backlight
- Alarm Indication for Each Channel
- PC suite software for plotting graphs


PC SUITE

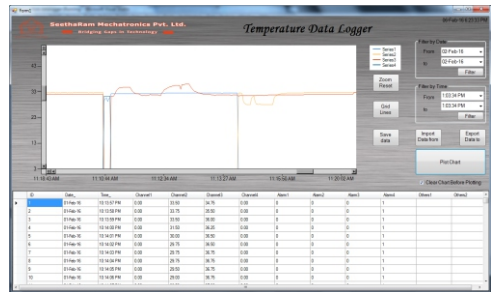

TECHNICAL SPECIFICATION

Model	Meya
Power supply	5vdc
Current consumption	250 mA (Approx.)
Input	Thermocouple K-type (Default) Thermocouple J-type (On request)
Channel	4
Temperature units	°C
Accuracy	±0.1%
Temperature resolution	0.01° for temperatures below 100°C 0.1° for temperatures below 1000°C 1° for temperatures above 1000°C
Display	72 mm (2.83") TFT, 320 x 240 touch screen
Display response time	1 Second
Data logging interval	1 Sample/Sec/Ch
Internal memory	4 GB
Variables logged	Measured temperature & Alarm events
Configurable parameters	Alarms, Date and time, Data logging
Alarm configuration	8 x Alarms (2 per channel) with adjustable level individually configurable as HI or LO
Software specification	Graph plot, save values in excel and graph in png & comparison of all graphs
Operating temperature	0 to 50°C (32 to 122°F)
Dimension	130 x 90 x 40 mm (Approx.)
Weight	300g

DIMENSION DETAILS

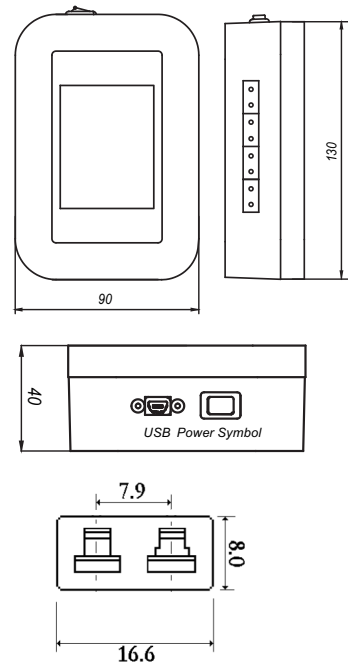

Specifications are subject to change without notice

MEYA ENDURANCE

Endurance indicator controller is a smart replacement of conventional endurance man machine interfaces.

This smart touch screen interface indicates the status of the critical parameter of endurance test rig. Such as machine ON/OFF status, cycle counts, cycle timer and one critical process value indication.

This process indicator is capable of storing the previous count data even in the case of any unexpected power failures.

Touch screen based Reset and timer setting option makes the user interface easier.




FEATURES

- Compact size with touch screen interface.
- Inbuilt user definable counter.
- Previous cycle count and setting parameter memory to avoid loss of configuration and cycle count due to unexpected power failure.
- User definable delay option for timer rest to synchronous with equipment functionality.


APPLICATIONS

- Valves testing
- Brakes testing
- Clutches testing
- Other all automotive actuators


FLOW CHART OF TYPICAL ENDURANCE TEST RIG

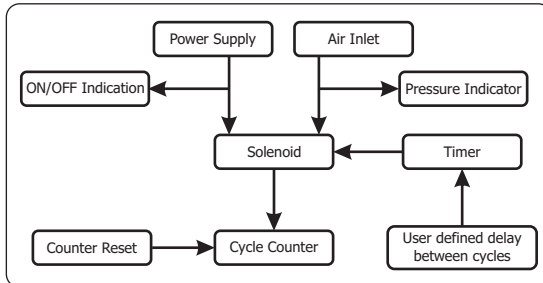

MOUNTING



DIMENSIONAL DETAILS

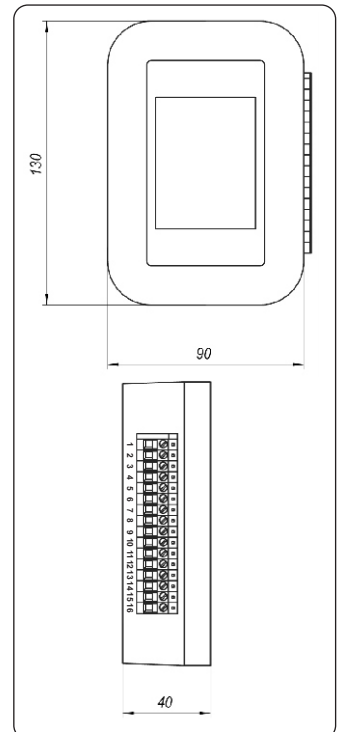

MEYA PRO

The four-channel touch screen mini data logger that accepts four sensor analog inputs. Each channel has individually configurable HI/LO alarms. The intuitive touch screen interface allows each channel to be configured separately for input type, alarm, logging and display options. All four channels can be displayed and logged simultaneously or individually.

FEATURES


- Four analog inputs – voltage or current (user selectable)
- Display and Log All 4 Channels Simultaneously or Individually
- Scheduled and Manual Logging Start/Stop
- 4 GB internal memory
- Display Maximum, Minimum, Average and Standard Deviation
- Battery or Mains Powered (With Adaptor)
- Touch Screen with Backlight
- Alarm Indication for Each Channel
- PC suite software for plotting graphs and store data in excel.

TECHNICAL SPECIFICATION

Model	Meya Pro
Power supply (VDC)	5
Current consumption (mA)	250 approx.
Analog Input / Resolution	0-10 VDC, 0-5 VDC, 0-20mA & 4-20mA / 24bit
Sensor excitation (VDC)	12
Channel	4
Units	M, mm, Kg, N, bar & psi
Display	72 mm (2.83") TFT, 320 x 240 touch screen
Decimal	1~3 Points user selectable (X.XXX)
Display response time	1 Second
Data Logging Interval per channel	20 Sample/second
Internal memory	4 Gb
Variables Logged	Measured inputs & alarm events
Configurable Parameters	Analog input units, Alarms, Date and time, Data logging & Power options.
Alarm Configuration	8 x alarms (2 per channel) with adjustable level individually configurable as HI or LO
Signal Processing	Average, minimum, maximum, standard deviation
Software specification	Graph plot, save values in excel and graph in png & Comparison of all graphs
Communication	USB
Option	Battery power bank for sensor excitation
Operating Temperature (°C)	0 - 50
Storage Temperature (°C)	0- 100
Dimension (mm)	150 x 110 x 40 (Approx.)
Weight (g)	300



DIMENSION DETAILS

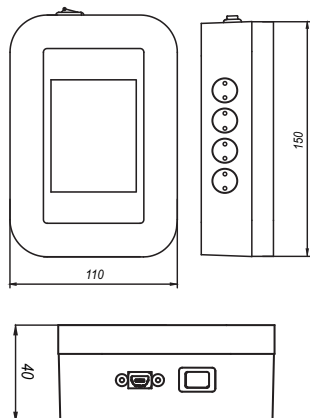

Optional



DATA LOGGER - 4 CHANNEL

'Sangrah' data logger allows simultaneous measurement, visualization and control of 4 channels of field parameters. 'Sangrah' is ideal for Datalog applications on small machines / equipment which require small & self sufficient intelligent device with in-built device for numeric and graphic display of field input values. 'Sangrah' augments the machine controllers with sequential log of data of interest with time stamp, identification of critical alarms / limits.

This equipment also suits mobile applications such as in-vehicle logging, on the run inspection / test log on machines, remote logging and similar applications.


FEATURES

- 7 Inch LCD capacitive color Touch screen- 4 channel datalogger
- Optional RS-485, RS-232, Ethernet and USB interfaces
- Visualisation as Digits, Bargraphs, Graphs,
- Logging functions - Max. 100 samples/sec
- Save values in excel and graph in Pdf format.
- Overlapping past data
- Saving data
- Data View
- Data Export
- Swap channel

TECHNICAL SPECIFICATION

Model	Data Logger
Power supply	12V DC
Current consumption	2 Amps
Display	7 Inch 1280*800 pixels capacitive touch
No. of channel's	4
Measuring inputs(analog)	-10 to +10v
Digital I/O's	4 (5V TTL) optional 8
Counter I/O'S	1 (5V TTL)
Communication interface	RS-232, RS-485, USB
Samples/Sec/Channel	100
IP	IP 60
Data memory	5 GB
Operating temperature	0 to 55°C
Storage temperature	-40 to 60°C
Options	Battery backup, Pen drive & Connectivity
Max. Expandable storage	32 GB


HOME SCREEN

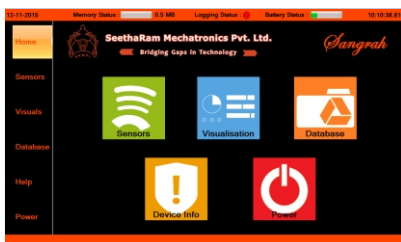

Specifications are subject to change without notice



DIMENSION DETAILS

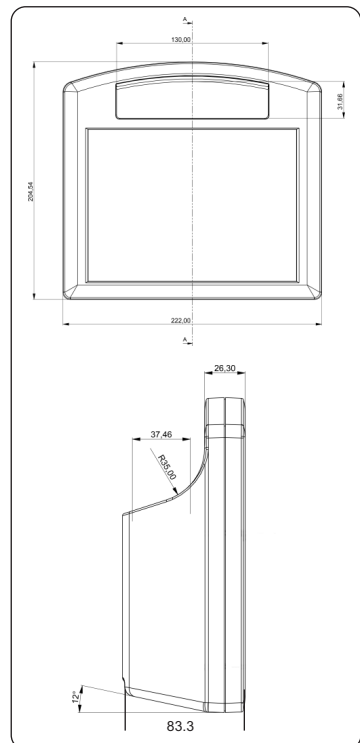

DATA LOGGER - 4 CHANNEL


Applications

- Energy Management system – monitor energy usage
- Industrial process – monitor and alert
- Metal Refining / Production
- Energy usage studies
- Process control tuning
- Outflow monitoring
- HVAC System troubleshooting
- Cooling tower efficiency studies
- Compressed Air Audit
- Laboratory bench test data collection
- Durability testing
- Lifetime quantification studies
- Offshore buoys for recording a variety of environmental conditions.
- Road traffic counting
- Process monitoring for maintenance and troubleshooting applications.
- Tank level monitoring
- Hydrographic recording (such as water level, water depth, water flow, water pH, water conductivity)
- Vehicle Testing (including crash testing)

Power Options Screen




Data Settings Screen

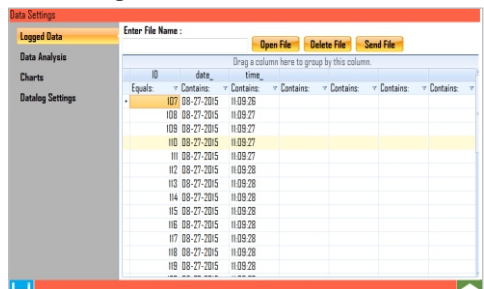


Visualisation Screen - 1




Visualisation Screen - 2

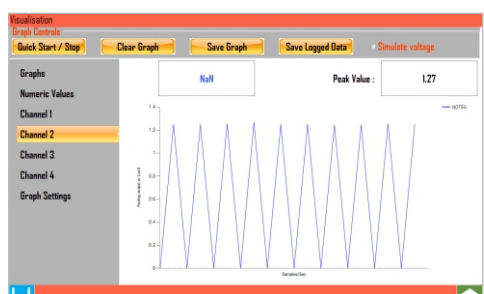

Sensor Setting Screen

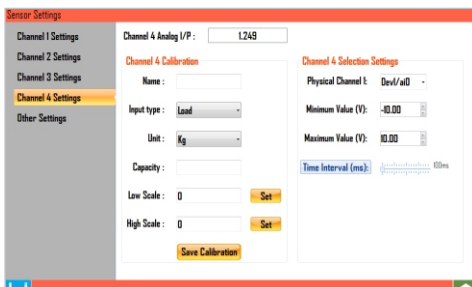

Digital I/O Setting Screen

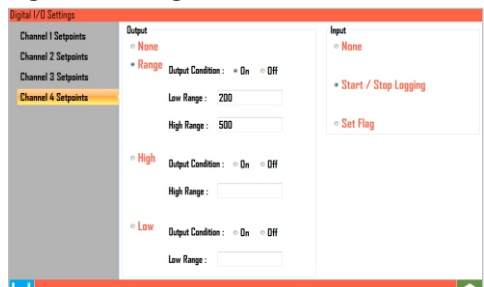

Specifications are subject to change without notice

BRAKE / CLUTCH TEST LOGGER



Home Screen


Brake test logger is used to analyze and evaluate performance of braking system.



The logger is compatible to inputs of sensors like linear travel sensor for pedal displacement, pedal force sensor, pressure sensor of brake lines after ABS Pump and speed sensors. Derived parameter such as distance, acceleration, deceleration, MFDD can also be derived and analyzed. It also supports temperature amplifier to measure temperature inputs.




Clutch logger helps to analyze and determine the performance of clutch release systems based on measurement and plotting of pedal force versus clutch displacement. Features are enable to make suitable tolerances for TAC '**Travel Adjusted Clutch**', OCS '**Over Centre Spring**' calculations

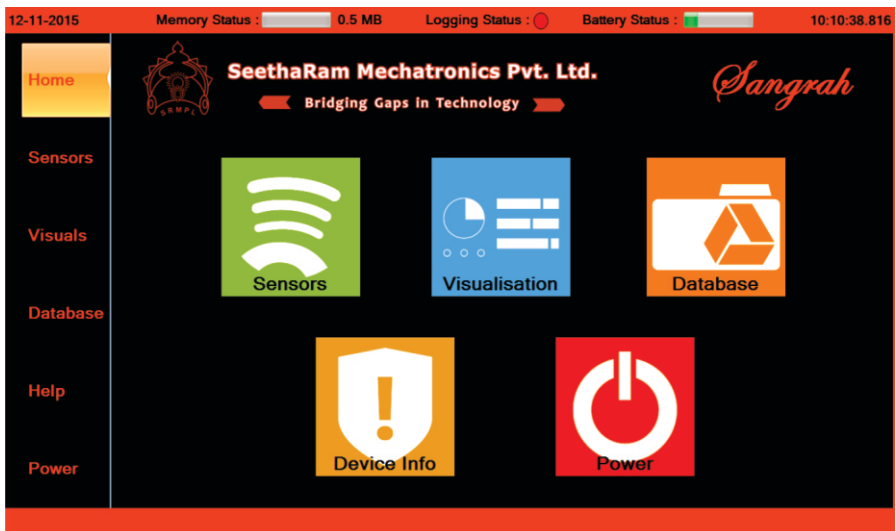

BRAKE / CLUTCH TEST LOGGER




Data Base Screen

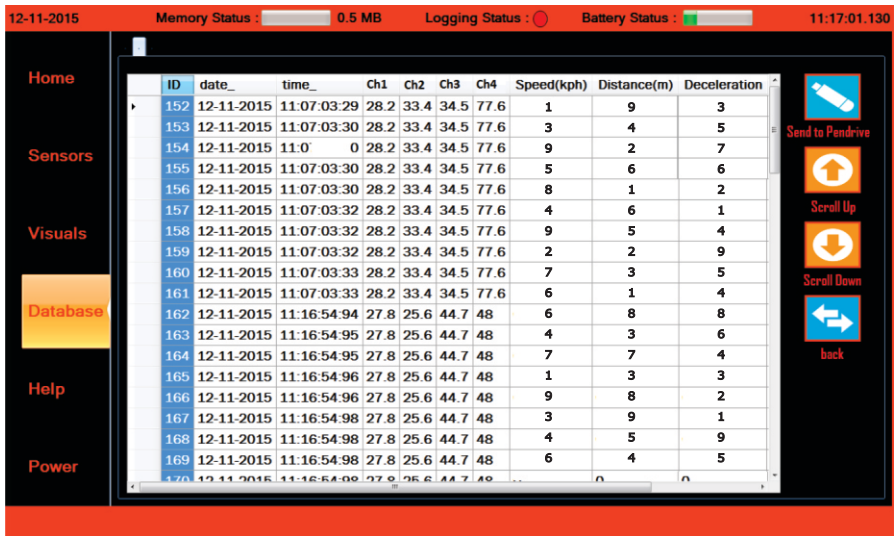

Master Database for Online & Post analysis



Graph Screen

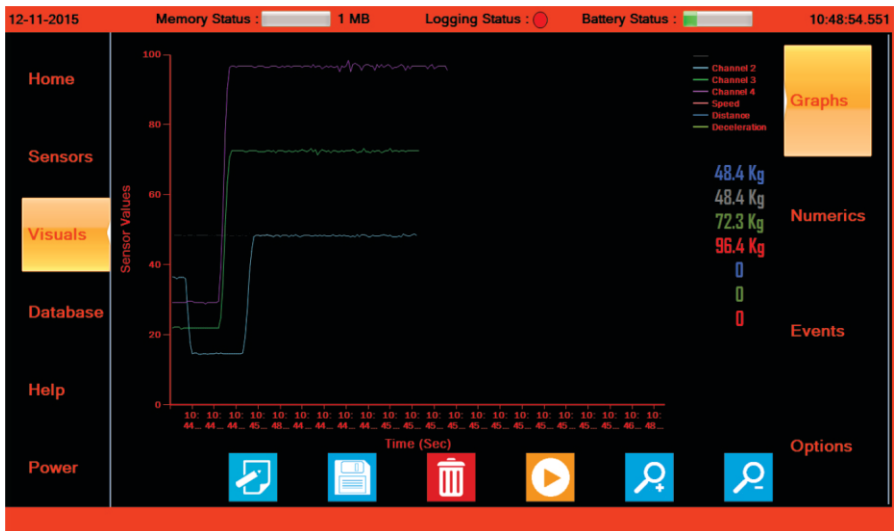

Derived channels viz Speed, Distance, Deceleration MFDD

Specifications are subject to change without notice

BRAKE / CLUTCH TEST LOGGER



Channel Setting Screen

12-11-2015 Memory Status : 0.5 MB Logging Status : Battery Status : 10:17:57.891

Channel 1 Calibration

Name : Loadcell Channel 1 Analog I/P : 3.85

Input type : Load Channel 1 Value : 77 Kg

Unit : Kg Physical Channel : Channel 1

Decimal : 2

Low Voltage : 0 High Voltage : 5

Low Value : 0 Set High Value : 100

■ Logging ■ Plotting

Channel 1
Channel 2
Channel 3
Channel 4
Counter
Trigger

Distinguished calibration setting



Soft Trigger Screen

12-11-2015 Memory Status : 0.5 MB Logging Status : Battery Status : 10:26:36.591

Soft Trigger Settings

Enter File Name : Test1 Create new File

Soft Trigger : ■ Enable Samples / Seconds : 10 • 50 • 100

Threshold Apply

Value : 10

Channel : Channel 1

Condition : Channel 1
Channel 2
Channel 3
Channel 4
Speed
Distance

Threshold Release

Value : 50

Channel : Channel 1

Condition : >
<
=>
<=>

Display Refresh Rate

Trigger


Soft Trigger based logging and plotting

SPRING TEST LOGGER



Home Screen


Spring testing systems are ideal for high volume production testing, quality control inspection, and design engineering. The force sensor (Load-cell) is fixed inline and displacement sensor in parallel to the actuation cylinder/ ram compressing the spring under test. The force vs displacement data gives the analysis of the subject spring. The spring performance analysis is a must for all critical assemblies in which the spring is an important constituent.

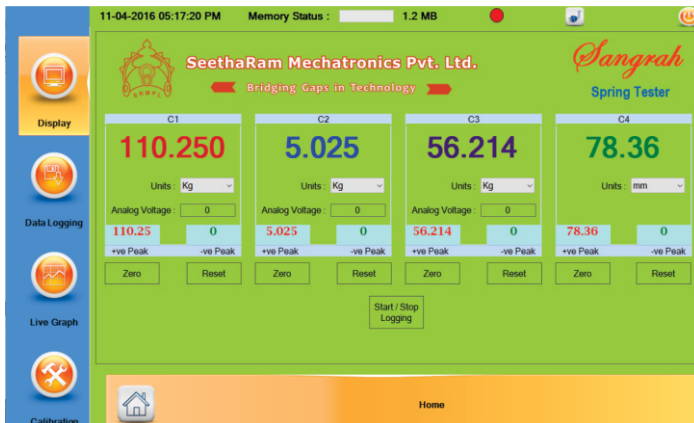

Real time value of 3 load cell and a displacement sensor with peak and zero option



Logging Setting Screen

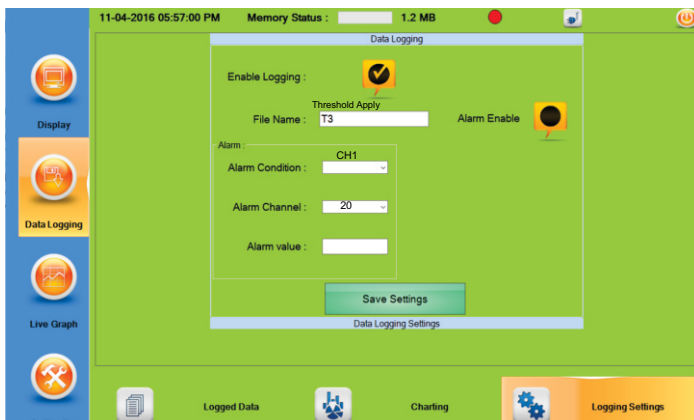

Enable logging and alarm. Set condition for alarm

Specifications are subject to change without notice



Calibration Setting Screen

11-04-2016 05:57:54 PMMemory Status : 1.2 MB

Display

Data Logging

Live Graph

Calibration

Channel 4

Name : C1

Input type : Load

Unit : KgDecimal : 3

Low Voltage : 0High Voltage : 10

Low Value : 0High Value : 1

Save Settings

Channel 4 Calibration and Settings

1Channel 1

2Channel 2

3Channel 3

4Channel 4

Individual Channel Calibration - Channel Name, Units & Scale Values user configurable



Spring Test Logger



Load Cell Calibrator




LOAD CELL CALIBRATOR



Home Screen

A versatile machine that facilitates both compression and tension calibrations. The design contributes to accurate calibrations by assuring axial loading while eliminating all friction and machine losses.

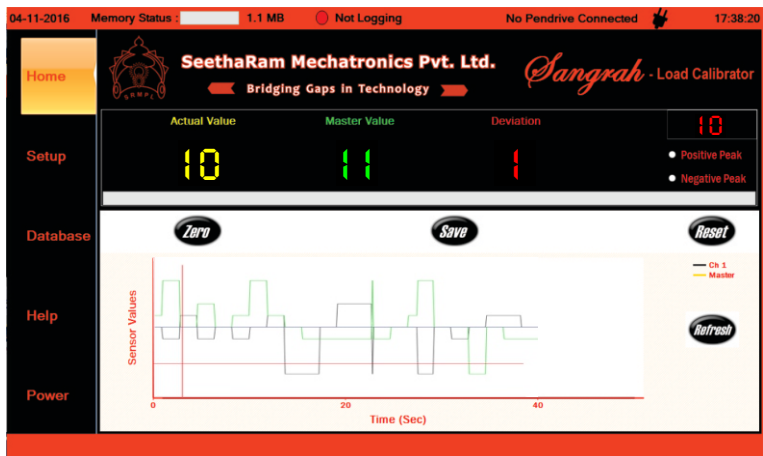

Display vales of master, actual and deviation value. Graphical representation of sensor vs time



Calibration Setting Screen

Calibration setting of load cell and its units conversion

Specifications are subject to change without notice

LOAD CELL CALIBRATOR



Setting Screen

04-11-2016Memory Status : 1.1 MBNot LoggingNo Pendrive Connected17:39:07

HomeSetupDatabaseHelpPower

Settings

Enter File Name : TESTNew File

Test No : 1

ManualAuto

Save Settings

Channel 1TestSetup

User Friendly Customizable Test report management



Screen

04-11-2016Memory Status : 1.1 MBNot LoggingNo Pendrive Connected17:39:29

HomeSetupDatabaseHelpPower

List of Files :

ID	datetime	load	master	deviation	testno	masterval
1	17-03-...	0	0	0	0	0
2	17-03-...	0	0	0	0	0
3	17-03-...	0	0	0	0	0
4	17-03-...	0	0	0	0	0
5	17-03-...	0	0	0	0	0

List of Tests :

ID	datetime	load	master	deviation	testno	masterval
1	17-03-...	0	0	0	0	0
2	17-03-...	0	0	0	0	0
3	17-03-...	0	0	0	0	0
4	17-03-...	0	0	0	0	0
5	17-03-...	0	0	0	0	0

Refresh

Send Data

Send Database

Delete File

Plot Graph

Hassle free database management


Specifications are subject to change without notice



Testing Machines

FORCE TESTING

- ⇒ LOAD VS DISPLACEMENT
- ⇒ LOAD VS TIME
- ⇒ COMPRESSION, TENSILE TESTING MACHINE
- ⇒ DESTRUCTIVE TESTING MACHINE



Force Testing Machine

Force testing machine designed for testing the component on load versus displacement and load versus time method. The capacity of this machine is 2.5ton and the displacement range is 200mm.

This method can be operated on two modes, (I)Quality testing and (II)Destructive testing. In quality testing mode the load and displacement can be predefined. If the test result is within the tolerance method the product is OK and the machine will indicate PASS. In case of the tolerance level exceeding or below the limit the machine will indicate FAIL. In destructive testing procedure peak will be enabled for both load and displacement. So, the peak of the load achieved for destruction and peak displacement for destruction will be captured and displayed.

Components to be tested: Spring, plastic, concrete, chair, belt, glass, rods, cables, ropes, wires, textiles, chains, fiber.

Application: Spring manufacturers, spring end users, chain manufacturers, clutch manufacturers, textile industries, polymer manufacturers, optical and lens manufacturers.

Torque Testing Machine

Torsion testing machine is mainly used for testing the torsion angle and torque of various torsion springs, coil springs, elastic components and other friction structures. This product is suitable for all types of tensional spring testing for CW & CCW directions.



Sensing device: Torque transducer- for determining twist per turn Encoder –for measuring angle

Range : 2NM to 20NM

Components: Pump, alternator, motor, shaft, bearing, gearbox and rotary components.

TORQUE TESTING

- ⇒ TORQUE VS ANGLE
- ⇒ TORQUE VS RPM
- ⇒ TORQUE VS TIME

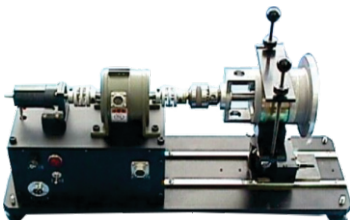

DISPLACEMENT BASED TESTING EQUIPMENTS


➤ PROFILE CHECKER

Profile Checker

Profile checker inspection system is an automated and highly accurate system for measurement and visual defect inspection of camshafts. The system can detect extremely minute visual defects and can measure diameters with an accuracy of up to 50 microns.

Range: 250X350mm

Components: Camshaft, gear, sprockets.

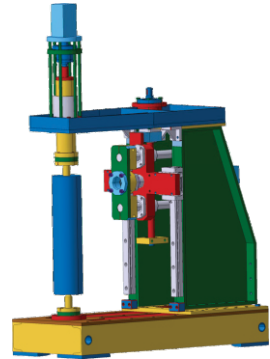

Handheld Equipments

Analog and serial (RS232) interfaces for connection to a pc


Display of AVG, MIN, MAX and PEAK values

Auto tare option, peak hold and sample hold

You need customized solution to your measuring problem, we will be glad to design a model for your special application.



HANDHELD EQUIPMENT

- ID AND OD MEASURING.
- THREAD TENSION
- PUSH PULL
- THICKNESS MONITORING
- LOAD CALIBRATION



INVEHICLE TESTING EQUIPMENT

- ⇒ PEDAL DISPLACMNT
- ⇒ STEERING TORQUE VS ANGLE
- ⇒ GEAR FORCE VS DISPLACMNT
- ⇒ TORQUE FOR KEY AND SWITCHES

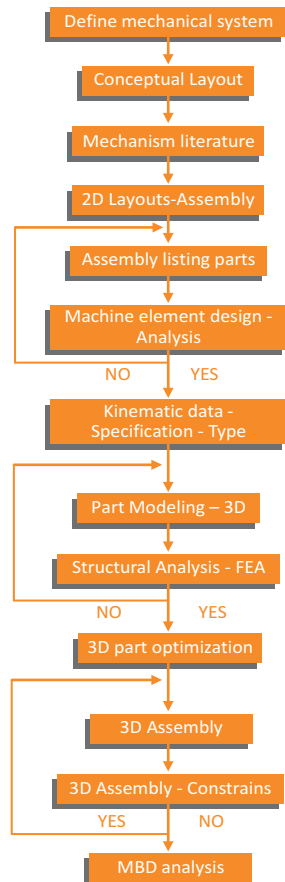

We have supplied:

Radio active capsule - Pebble tester, Research institute - Cone calibrator,
Spring manufacturing unit - Spring testing machine

Wheels manufacturing unit

Automating the hydraulic press with respect to pressure and displacement. If pressure and displacement are within the set limit the component is pass if not it is fail.

Brakes research unit

Process Automation of endurance test rig of booster with respect to predefined set limit of pressure and vacuum.

Brakes pressure and its travel measuring system

To check the pressure generated inside brake chamber when the brake is applied and parallelly calculate displacement of brake pedal



Development & Prototyping



Hardware Design

SeethaRam Mechatronics Pvt Ltd

BRIDGING GAPS IN TECHNOLOGIES



Bridging Gaps in Technology

SeethaRam
Mechatronics Pvt Ltd

Regd. Office: #3, 1st floor, 8th Street, Vaishnavi Nagar, Chennai - 600 109.

Tel : +91-44-26383372, +91-44-26371252, Fax : +91-44-26379883

Web: www.seetharam.in,

Email: ram@seetharam.in