



User Friendly Device Configurator App

Easily configure **Vibes** with cloud server and also can view device data locally on APP Dashboard

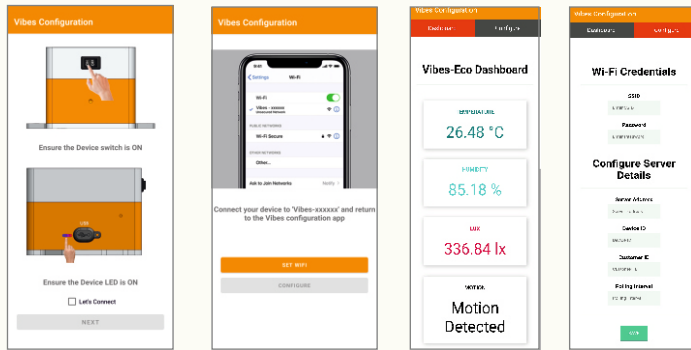

Views for our Vibes Platform

Views is a browser-based solution which enables a ready dashboard for all types of VIBES IoT Devices registered online.

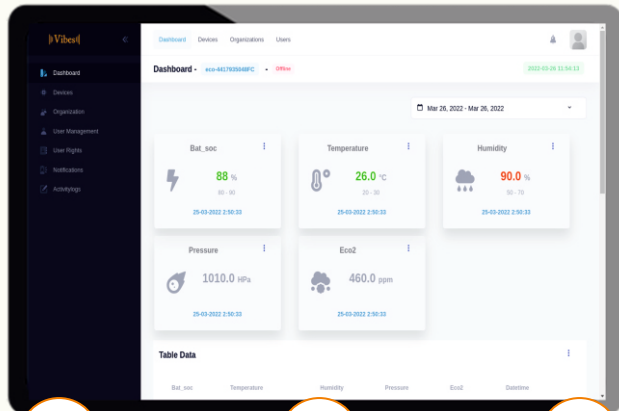

Multi Protocol
Connect with both HTTP & MQTT Protocol devices



Multi-view Dashboard
Minimalistic & User friendly multi-view dashboard



Data Log
Data is secured in structured database; Download in multiple formats



Event / Push Notifications
Get instant alerts and notifications from connected devices.



User Rights Management
Easily assign new users and specific user rights




Activity Logs
Admin can view all applications activity logs.



Data Set Points
Set Alarm set points for individual parameters of device.

Make IIOT Implementation easy with our Vibes Platform

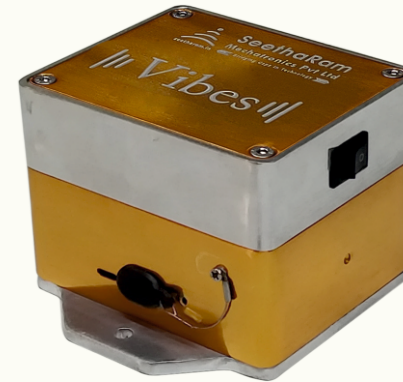


Vibes

Bridging Gaps in IT & OT

- High Resolution Analog & Digital Sensor**
Connected with high resolution & reliable Analog & Digital sensors
- Digital / Status Input**
View your Input Status
- Truly wireless**
No need of extra gateway
- Multi Protocol**
Support Wi-Fi, MQTT & MODBUS 485
- FOTA Updates**
Enable Vibes upgrade the firmware remotely & seamlessly

- Build quality**
Tough Industrial Grade Aluminium Enclosure
- USB - C**
User friendly & Latest Gen
- Inbuilt Battery**
Comes with Inbuilt 2200mAH Battery
- Inbuilt Storage Memory**
Comes with Inbuilt 32Gb of Memory
- Display (Opt.)**
Comes with Display as Optional

- Accelerometer
- Strain
- Tilt
- ECO
- Temperature
- Gaman
- Ventilation
- Fire/Smoke
- Dioxygen
- Air Quality
- Rodent Presence
- Door Ajar
- Fumigation
- Ph3



|| Vibes || - Air Quality


This Probe is meant for industry-proven quality and reliability in measurement of **humidity, temperature, eCO2 & Pressure** parameters with accuracy, continuously, 24 x 7 for many years.

|| Vibes || - Ventilation

This measures the adequacy of ventilation within the warehouse so that aeration is maintained.




|| Vibes || - Fumigation & Dioxygen



The Dioxygen & Fumigation Sensor employs electrochemical technology. Fumigation in warehouse, release toxic Phosphine gas during which human entry should be prohibited.


|| Vibes || - Door Ajar / Fire/Smoke

A Pair of Door Lock Sensor ensure door being open only on permission and closed during fumigation. Flame & Smoke Detector ensure safety.

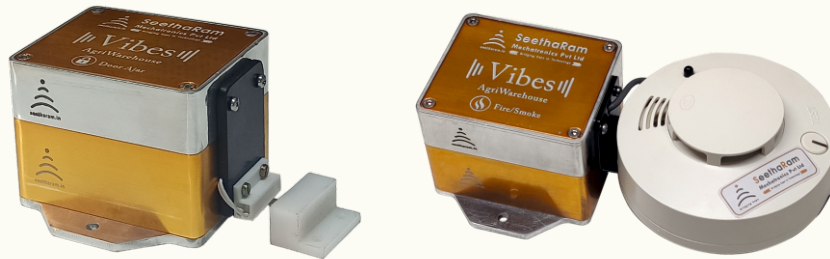

|| Vibes || - Rodent Presence

Rodent motion sensor detect the presence of Rodents activity The device is small and can placed for detecting different types of the target. These are placed at strategic places to detect rodent activity



|| Vibes || - RhT

The sensor covers a humidity measurement range of 0 to 100 %RH and a temperature measurement range of -40°C to 125°C with a typical accuracy of $\pm 2\%$ RH and $\pm 0.2^\circ\text{C}$.



|| Vibes || - Strain

This can connect to full bridge strain sensors like **Loadcell, Torque Sensors**.

|| Vibes || - Current / Voltage

Input Sensor: 0~20 / 4~20mA
Input Sensor: 0~5 / 0~10V DC



|| Vibes || - Accelerometer

The Vibes Accelerometer is an extremely sensitive 3-axis acceleration sensor. It is especially designed for measurements of vibration in structural monitoring (vibration) of whole or parts of buildings, vibration measurement of rotating machinery, for monitoring tower vibration at wind power plants etc.

Need to prove compliance?

Use it as Display unit, Local Logger and generate Conformance / Production reports.

